

Dibbler – a portable DHCPv6

User's guide

Tomasz Mrugalski
[thomson\(at\)klub.com.pl](mailto:thomson(at)klub.com.pl)

2012-02-28

0.8.2

Contents

1	Intro	6
1.1	Overview	6
1.2	Supported parameters	8
1.3	Not supported features	9
1.4	Operating System Requirements	10
1.5	Supported platforms	10
2	Installation and usage	11
2.1	Linux installation	11
2.2	Windows installation	11
2.3	Mac OS X installation	12
2.4	FreeBSD, NetBSD, OpenBSD	12
2.5	Basic usage	12
3	Compilation	13
3.1	Linux/Mac OS X/FreeBSD/NetBSD/OpenBSD Compilation	13
3.2	Modern Windows (XP...Win7) compilation	13
3.3	Legacy Windows (NT/2000) compilation	14
3.4	IPv6 support	14
3.4.1	Setting up IPv6 in Linux	14
3.4.2	Setting up IPv6 in Windows Vista and Win7	14
3.4.3	Setting up IPv6 in Windows XP and 2003	14
3.4.4	Setting up IPv6 in Windows 2000	14
3.4.5	Setting up IPv6 in Windows NT4	15
4	Features HOWTO	16
4.1	Prefix delegation	16
4.2	Relays	17
4.3	Routing configuration	17
4.4	Custom options	20
4.5	DNS Update	21
4.5.1	Example BIND configuration	22
4.5.2	Dynamic DNS Testing and tips	25
4.5.3	Accepting Unknown FQDNs	26
4.6	Introduction to client classification	27
4.6.1	Client class declaration	27
4.6.2	Access control	28
4.6.3	Assigning clients to defined classes	28
4.6.4	Examples of Client-Class Classifying	29
4.7	External script	30
4.8	Confirm	30
4.9	Mobility	30
4.10	Leasequery	31
4.11	Stateless vs stateful and IA, TA options	31
4.12	Server address caching	33
4.13	XML files	33
4.14	Authentication and Authorization	33
4.15	Exceptions: per client configuration	35
4.16	Vendor specific information	35

4.17	Not connected interfaces (inactive-mode)	36
4.18	Parameters not supported by server (insist-mode)	36
4.19	Different DUID types	36
4.20	Debugging/compatibility features	37
4.20.1	Interface-id option	37
4.20.2	Non-empty IA_NA option	38
4.20.3	Providing address/prefix hints	38
4.21	Experimental features	38
4.21.1	Address Parameters	39
4.21.2	Remote Autoconfiguration	40
4.22	Obsoleted experimental features	41
4.22.1	Mapping prefix	41
4.22.2	Tunnel mode	42
5	Server configuration	43
5.0.3	Global scope	43
5.0.4	Interface declaration	43
5.0.5	Address class scope	43
5.0.6	Prefix class scope	44
5.0.7	Temporary address class scope	44
5.0.8	Routing scope	44
5.0.9	Server options	44
5.0.10	Client class quantifiers	50
5.1	Server configuration examples	50
5.1.1	Example 1: Simple	50
5.1.2	Example 2: Timeouts	51
5.1.3	Example 3: Limiting amount of addresses	51
5.1.4	Example 4: Unicast communication	52
5.1.5	Example 5: Rapid-commit	52
5.1.6	Example 6: Access control	52
5.1.7	Example 7: Multiple classes	53
5.1.8	Example 8: Relay support	53
5.1.9	Example 9: Cascade 2 relays	54
5.1.10	Example 10: Dynamic DNS (FQDN)	54
5.1.11	Example 11: Vendor-specific Information option	57
5.1.12	Example 12: Per client configuration	57
5.1.13	Example 13: Prefix delegation	58
5.1.14	Example 14: Multiple prefixes	59
5.1.15	Example 15: Inactive mode	59
5.1.16	Example 16: Leasequery	60
5.1.17	Example 17: Authentication	60
5.1.18	Example 18: Relay support with unknown interface-id	60
5.1.19	Example 19: DS-Lite tunnel (AFTR)	61
5.1.20	Example 20: Custom options	61
5.1.21	Example 21: Remote Autoconfiguration	61

6	Client configuration	62
6.1	Data types	62
6.2	Scopes	62
6.2.1	Interface declaration	62
6.2.2	IA declaration	63
6.2.3	TA declaration	63
6.2.4	PD declaration	63
6.2.5	Address declaration	64
6.2.6	Prefix declaration	64
6.3	Stateless configuration	64
6.4	Relay support	64
6.5	Comments	65
6.6	File location	65
6.7	Client Reference	65
6.8	Client Configuration Examples	71
6.8.1	Example 1: Default	71
6.8.2	Example 2: DNS	71
6.8.3	Example 3: Timeouts and specific address	72
6.8.4	Example 4: More than one address	72
6.8.5	Example 5: Quick configuration using Rapid-commit	73
6.8.6	Example 6: Stateless mode	73
6.8.7	Example 7: Dynamic DNS (FQDN)	73
6.8.8	Example 8: Interface indexes	74
6.8.9	Example 9: Vendor-specific options	75
6.8.10	Example 10: Unicast communication	75
6.8.11	Example 11: Prefix delegation	76
6.8.12	Example 12: Insist mode	76
6.8.13	Example 13: Inactive mode	77
6.8.14	Example 14: Authentication	77
6.8.15	Example 15: Skip Confirm	77
6.8.16	Example 15: User-defined IAID	77
6.8.17	Example 16: DS-Lite tunnel (AFTR)	78
6.8.18	Example 17: Custom options	78
6.8.19	Example 18: Remote Autoconfiguration	78
7	Relay configuration	80
7.1	Global scope	80
7.2	Interface declaration	80
7.3	Options	80
7.4	Relay configuration examples	81
7.4.1	Example 1: Simple	81
7.4.2	Example 2: Unicast/multicast	82
7.4.3	Example 3: Multiple interfaces	82
7.4.4	Example 4: 2 relays	83
7.4.5	Example 5: Guess-mode	83
7.4.6	Example 6: Relaying to multicast	84
8	Requestor configuration	85

9	Frequently Asked Questions	86
9.1	Common Questions	86
9.2	Linux specific questions	87
9.3	Windows specific questions	87
10	Miscellaneous topics	88
10.1	History	88
10.2	Contact and reporting bugs	88
10.3	Mailing lists	88
10.4	Thanks and greetings	89
11	Acknowledgements	90
	Bibliography	92

1 Intro

First of all, as an author I would like to thank you for your interest in this DHCPv6 implementation. If this documentation doesn't answer your questions or you have any suggestions, feel free to contact me. See [Contact](#) section for details. Also be sure to check out Dibbler website: <http://klub.com.pl/dhcpv6/>.

Tomasz Mrugalski

1.1 Overview

Dynamic Host Configuration Protocol for IPv6, often abbreviated as DHCPv6, is a protocol, which is used to automatically configure IPv6 capable computers and other equipment located in a local network. This protocol defines *clients* (i.e. nodes, which want to be configured), *servers* (i.e. nodes, which provide configuration to clients) and *relays* (i.e. nodes, which are connected to more than one network and are able to forward traffic between local clients and remote servers). Also, special type of DHCPv6 entity called *requestor* has been defined. It is used by network administrator to query servers about their status and assigned parameters.

Dibbler is a portable DHCPv6 solution, which features server, client and relay. Currently there are ports available for many Windows platforms ranging from NT4 to Windows 7, Linux 2.4/2.6 systems and Mac OS (experimental). See [Section 1.4](#) for details. It supports both stateful (i.e. IPv6 address granting) and stateless (i.e. options granting) autoconfiguration. Besides basic functionality (specified in basic DHCPv6 spec, RFC3315 [3]), it also offers several enhancements, e.g. DNS servers and domain names configuration.

Dibbler is an open source software, distributed under [GNU GPL v2](#) licence. It means that it is freely available, free of charge and can be used by anyone (including commercial users). Source code is also provided, so anyone skilled enough can fix bugs, add new features and distribute his/her own version.

Requestor support has been added in version 0.7.0RC1. Requestor is a separate entity, which sends queries to the server regarding leases to specific clients. It is possible to ask a server, who has specific address or what addresses are assigned to a specific client. This feature is part of the lease query mechanism defined in [16] and is considered advanced topic. If you don't know what lease query is, you definitely don't need it.

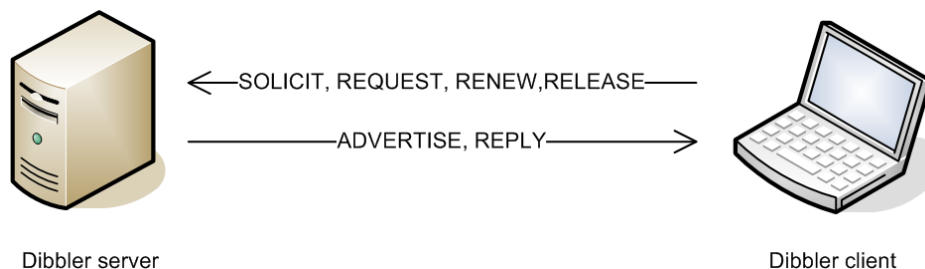


Figure 1: *General DHCPv6 operation*

As for now, Dibbler supports following features:

- Basic server discovery and address assignment (*SOLICIT*, *ADVERTISE*, *REQUEST* and *REPLY* messages) – This is a most common case: client discovers servers available in the local network, then asks for an address (and possibly additional options like DNS configuration), which is granted by a server.
- Server redundancy/Best server discovery – when client detects more than one server available (by receiving more than one *ADVERTISE* message), it chooses the best one and remembers remaining ones as a backup.

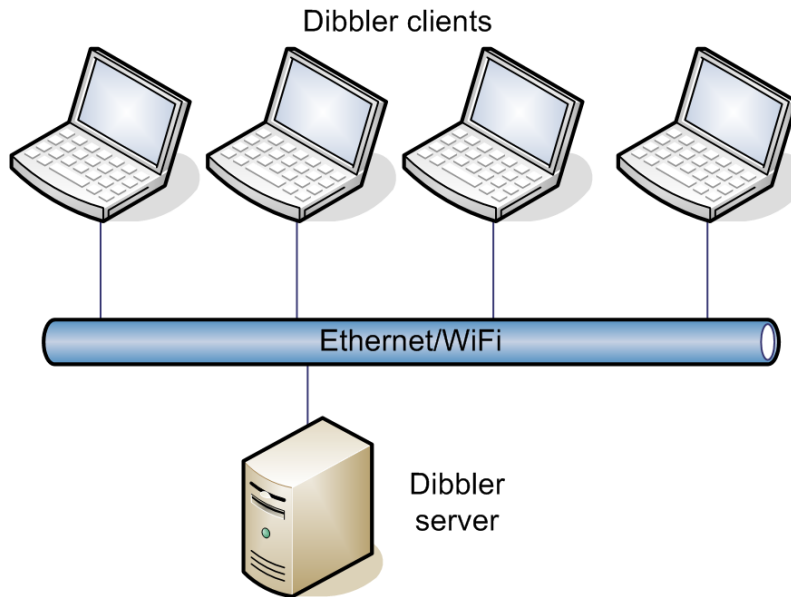


Figure 2: *Several clients supported by one server*

- Multiple servers support – Client is capable of discovering and maintaining communication with several servers. For example, client would like to have 5 addresses configured. Preferred server can only lease 3, so client send request for remaining 2 addresses to one of the remaining servers.
- Relay support – In a larger network, which contains several Ethernet segments and/or wireless areas, sometimes centrally located DHCPv6 server might not be directly reachable. In such case, additional proxies, so called relays, might be deployed to relay communication between clients and a remote server. Dibbler server supports indirect communication with clients via relays. Stand-alone, lightweight relay implementation is also available. Clients are capable of talking to the server directly or via relays.
- Address renewal – After receiving address from a server, client might be instructed to renew its address at regular intervals. Client periodically sends *RENEW* message to a server, which granted its address. In case of communication failure, client is also able to attempt emergency address renewal (i.e. it sends *REBIND* message to any server).
- Unicast communication – if specific conditions are met, client could send messages directly to a server's unicast address, so additional servers does not need to process those messages. It also improves efficiency, as all nodes present in LAN segment receive multicast packets.¹
- Duplicate address detection – Client is able to detect and properly handle faulty situation, when server grants an address which is illegally used by some other host. It will inform server of such circumstances (using *DECLINE* message), and request another address. Server will mark this address as used by unknown host, and will assign another address to a client.
- Power failure/crash support – After client recovers from a crash or a power failure, it still can have valid addresses assigned. In such circumstances, client uses *CONFIRM* message, to config if those addresses are still valid.

¹Nodes, which do not belong to specific multicast group, drop those packets silently. However, determining if host belongs or not to a group must be performed on each node. Also using multicast communication increases the network load.

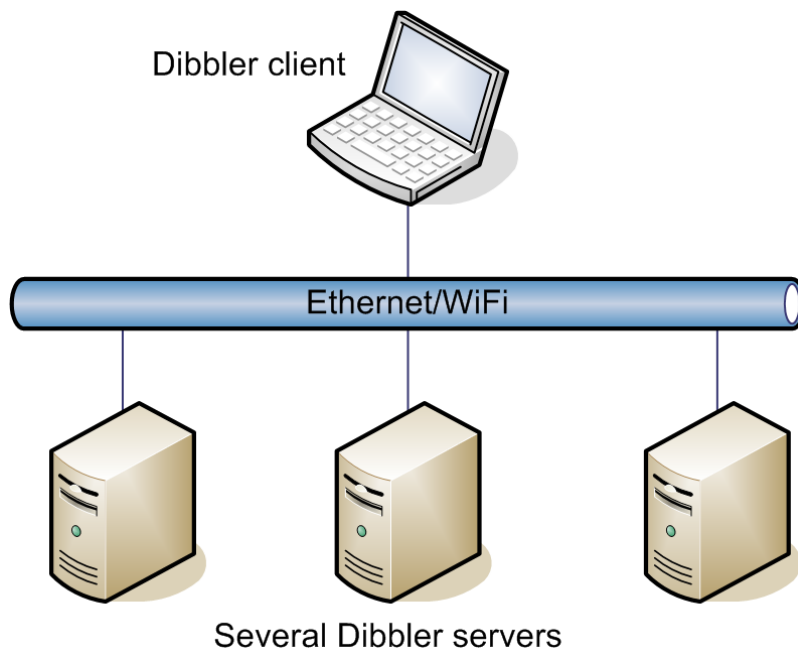


Figure 3: *Redundancy: several servers*

- Link change detection – Client can be instructed to monitor its link state. Once it detects
- Normal and temporary addresses – Depending on its purpose, client can be configured to ask for normal (*IA_NA* option) or temporary (*IA_TA* option). Although use of temporary addresses is rather uncommon, both dibbler server and client support it.
- Hint system – Client can be configured to send various parameters and addresses in the *REQUEST* message. It will be treated as a hint by the server. If such hint is valid, it will be granted for this client.
- Server caching – Server can cache granted addresses, so the same client will receive the same address each time it asks. Size of this cache can be configured.
- Stateless mode – Client can be configured to not ask for any addresses, but the configuration options only. In such case, when no addresses are granted, such configuration is called stateless (*INFORMATION-REQUEST* message is used instead of normal *REQUEST*).
- Rapid Commit – Sometimes it is desirable to quicken configuration process. If both client and server are configured to use rapid commit, address assignment procedure can be shortened to 2 messages, instead of usual 4. Major advantage is lesser network usage and quicker client startup time.

1.2 Supported parameters

Except RFC3315-specified behavior [3], Dibbler also supports several enhancements:

- DNS Servers – During normal operation, almost all hosts require constant use of the DNS servers. It is necessary for even basic operations, like web surfing. DHCPv6 client can ask for information about DNS servers and DHCPv6 server will provide necessary information. [7]
- Domain Name – Client might be interested in obtaining information about its domain. Properly configured domain allow reference to a different hosts in the same domain using hostname only, not

the full domain name, e.g. `alice.example.com` with properly configured domain can refer to another host in the same domain by using 'bob' only, instead of full name `bob.example.com`. [7]

- NTP Servers – To prevent clock misconfiguration and drift, NTP protocol [1] can be used to synchronize clocks. However, to successful use it, location of near NTP servers must be known. Dibbler is able to configure this information. [12]
- Time Zone – To avoid time-related ambiguation, each host should have timezone set properly. Dibbler is able to pass this parameter to all clients, who request it. [25]
- SIP Servers – Session Initiation Protocol (SIP) [2] is commonly used in VoIP solutions. One of the necessary information is SIP server addresses. This information can be passed to the clients. [4]
- SIP Domain Name – SIP domain name is another important parameter of the VoIP capable nodes. This parameter can be passed to all clients, who ask for it. [4]
- NIS, NIS+ Server – Network Information Service is a protocol for sharing authentication parameters between multiple Unix or Linux nodes. Both NIS and NIS+ server addresses can be passed to the clients. [9]
- NIS, NIS+ Domain Name – NIS or NIS+ domain name is another necessary parameter for NIS or NIS+. It can be obtained from the DHCPv6 server to all clients, who require it. [9]
- Option Renewal Mechanism (Lifetime option)– All of the options mentioned on this list can be refreshed periodically. This might be handy if one of those parameters change. [11]
- Dynamic DNS Updates – Server can assign a fully qualified domain name for a client. To make such name useful, DNS servers must be informed that such name is bound to a specific IPv6 address. This procedure is called DNS Update. There are two kinds of the DNS Updates: forward and reverse. First is used to translate domain name to an address. The second one is used to obtain full domain name of a known address. See section 4.5 for details. [13]
- Prefix Delegation – Server can be configured to manage a prefix pool, i.e. clients will be assigned whole pools instead on single addresses. This is very useful, when clients are not simple end users (e.g. desktop computers or laptops), but rather are routers (e.g. cable modems). This functionality is often used for remote configuration of IPv6 routers. [6]

1.3 Not supported features

Although list of the supported features increases with each release, some parts of the spec are not implemented yet. Below is a list of such features:

- Authorization and Authentication[3]
- Reconfigure mechanism[3]
- Any kind of security in DNS Updates[13]
- DNS Updates are done over IPv6 only. IPv4 support is not planned.
- Client ignores M and O bits in Router Advertisements and initiates operation as specified in its config file.

1.4 Operating System Requirements

Dibbler can be run on Linux systems with kernels from 2.4 and 2.6 series. IPv6 (compiled into kernel or as module) support is necessary to run dibbler. DHCPv6 uses UDP ports below 1024, so root privileges are required. They're also required to add, modify and delete various system parameters, e.g. IPv6 addresses.

Dibbler also runs on any Windows systems from Windows XP (Service Pack 1 or later) to Windows 7. To install various Dibbler parts (server, client or relay) as services, administrator privileges might be required. Support for Windows NT4 and 2000 is limited and considered experimental. Due to lack of support and any kind of informations from Microsoft, this will not change. In fact, support for NT4 and 2000 is expected to be dropped soon.

There is working Mac OS X port available.

Support for FreeBSD, NetBSD and OpenBSD was added in 0.8.1RC1, but those versions are not very well tested. They are confirmed to compile and be able to start operation. Author was not able to test them thoroughly, so reports regarding confirming their stability or detected issues are welcome. Please report them on the mailing list. See section [10.3](#).

See RELEASE-NOTES for details about version-specific upgrades, fixes and features.

1.5 Supported platforms

Although Dibbler was developed on the i386 architecture, there are ports available for other architectures: IA64, AMD64, PowerPC, HPPA, Sparc, MIPS, S/390, Alpha and ARMv5. They are available in the PLD, Gentoo and Debian Linux distributions. Other platforms are likely to be supported. Keep in mind that author has not tested those ports himself and need to rely on users' reports, so there might be some unknown issues present. If this is the case, be sure to notify package maintainers and possibly the author.

If your system is not on the list, don't despair. Dibbler is fully portable. Core logic is system independent and coded in C++ language. There are also several low-level functions, which are system specific. They're used for adding addresses, retrieving information about interfaces, setting DNS servers and so on. Porting Dibbler to other systems (and even other architectures) would require implementic only those serveral system-specific functions. See Developer's Guide for details.

2 Installation and usage

Client, server and relay are installed in the same way. Installation method is different in Windows and Linux systems, so each system installation is described separately. To simplify installation, it assumes that binary versions are used².

2.1 Linux installation

Starting with 0.4.0, Dibbler consists of 3 different elements: client, server and relay. During writing this documentation, Dibbler is already part of many Linux distributions. In particular:

Debian GNU/Linux, Ubuntu and derived – use standard tools (apt-get, aptitude and similar) to install dibbler-client, dibbler-server, dibbler-relay or dibbler-doc packages.

OpenSUSE – use standard installation mechanism.

PLD GNU/Linux – use standard PLD's poldek tool to install dibbler package.

Gentoo Linux – use emerge to install dibbler (e.g. emerge dibbler).

OpenWRT – there are package definitions for OpenWRT. At time of this writing, they were very outdated (using 0.5.0 version).

If you are using other Linux distribution, check out if it already provides Dibbler packages. You may use them or compile the sources on your own. See Section 3 for details regarding compilation process. Dibbler used to provide native DEB and RPM packages, but due to limited resources, author is not continuing this activity. If you are a Dibbler package maintainer and want your package to be put on dibbler website, please send such request on mailing list (see Section 10.3).

To install Dibbler on Debian or other system that provides apt-get package management system, run `apt-get install package` command. For example, to install server and client, issue the following command:

```
apt-get install dibbler-server dibbler-client
```

To install Dibbler in Gentoo systems, just type:

```
emerge dibbler
```

2.2 Windows installation

Dibbler supports Windows XP and 2003 since the 0.2.1-RC1 release. Support for Vista was added somewhere around 0.7.x. Support for Windows 7 was added in 0.8.0RC1. In version 0.4.1 experimental support for Windows NT4 and 2000 was added. The easiest way of Windows installation is to download clickable Windows installer. It can be downloaded from <http://klub.com.pl/dhcpv6/>. After downloading, click on it and follow on screen instructions. Dibbler will be installed and all required links will be placed in the Start menu. Note that there are two Windows versions (ports): one for modern systems (XP/2003/Vista and Win7) and one for archaic ones (NT4/2000). Make sure to use proper port. If you haven't set up IPv6 support, see following sections for details.

Operation on Windows 8 was never tested, so support is not confirmed.

²Compilation is not required, usually binary version can be used. Compilation should be performed by advanced users only, see Section 3 for details.

2.3 Mac OS X installation

As of 0.8.0 release, ready to use dmg packages are not provided, therefore dibbler has to be compiled. Please follow section 3 for generic Dibbler compilation that applies to Mac OS X.

Currently support for Mac OS X is usable, but there is still one notable limitation. Client is not able to configure DNS servers or domain name informations.

2.4 FreeBSD, NetBSD, OpenBSD

As of 0.8.1RC1 release, support for FreeBSD, NetBSD and OpenBSD has been added. There are no prebuilt binary packages available. Please follow Section 3 for generic Dibbler compilation that applies to all 3 mentioned OSes.

2.5 Basic usage

Depending what functionality do you want to use (server, client or relay), you should edit configuration file (`client.conf` for client, `server.conf` for server and `relay.conf` for relay). All configuration files should be placed in the `/etc/dibbler` directory. Also make sure that `/var/lib/dibbler` directory is present and is writeable. After editing configuration files, issue one of the following commands:

```
dibbler-server start
dibbler-client start
dibbler-relay start
```

`start` parameter requires little explanation. It instructs Dibbler to run in daemon mode – detach from console and run in the background. During configuration files fine-tuning, it is often better to watch Dibbler's behavior instantly. In this case, use `run` instead of `start` parameter. Dibbler will present its messages on your console instead of log files. To finish it, press `ctrl-c`.

To stop server, client or relay running in daemon mode, type:

```
dibbler-server stop
dibbler-client stop
dibbler-relay stop
```

To see, if client, server or relay are running, type:

```
dibbler-server status
dibbler-client status
dibbler-relay status
```

To see full list of available commands, type `dibbler-server`, `dibbler-client` or `dibbler-relay` without any parameters.

If your OS uses different layout of directories, you may want to modify `Misc/Portable.h` before starting compilation process.

3 Compilation

Dibbler is distributed in 2 versions: binary and source code. If there is binary version provided for your system, it is usually better choice. Compilation usually is performed by more experienced users. In average case it does not offer significant advantages over binary version. You probably want to just install and use Dibbler. If that is your case, read section named 2. However, if you are skilled enough, you might want to tune several Dibbler aspects during compilation. See *Dibbler Developer's Guide* for information about various compilation parameters.

3.1 Linux/Mac OS X/FreeBSD/NetBSD/OpenBSD Compilation

The following descriptions applies to Linux, Mac OS X, FreeBSD, NetBSD and OpenBSD. Other POSIX systems may work, but were never tested by author. If you would like to install Dibbler from sources, you will need all required dependencies. In particular, you need a typical C++ environment: a C and C++ compilers (most probably gcc and g++), make, and several other smaller tools.

To install Dibbler package from sources, go to project homepage and download latest tar.gz source archive. Extract it using available tool for that purpose (in most cases that would be tool called tar and gzip).

After sources are extracted, they must be configured to match specific operating system. To complete this step, a configure script must be called:

```
./configure
```

Configure script accepts many parameters, so if like to tweak something, here is your chance. You may run `./configure --help` to see list of available parameters. For example, to set up sources to compile in debug mode (useful if you want to debug them or provide better bugreport), you can do this:

```
./configure --enable-debug
```

Once configure completes its operation, it prints out details of its configuration and source are ready for compilation. To build all components, just type make. If you want to make specific component only, you may use it as parameter to make, e.g. `make server`. After successful compilation type `make install` to install compiled code in your system.

For example, to build server and relay, type:

```
tar zxvf dibbler-0.8.1RC1-src.tar.gz
./configure
make server relay
make install
mkdir -p /var/lib/dibbler
```

Configure script was added in 0.8.1RC1. Earlier versions do not need that step.

Dibbler was compiled using gcc 2.95, 3.0, 3.2, 3.3, 3.4, 4.0, 4.1, 4.2, 4.3, 4.4 and 4.5 versions. Note that many older compilers are now considered obsolete and were not tested for some time. Lexer files (grammar defined config file) were generated using flex 2.5.33. Parser file were created using bison++ 1.21.9. Flex and bison++ tools are not required to compile Dibbler. Generated files are placed in GIT and in tar.gz archives. Dibbler requires also make. Autoconf and automake tools (autotools) were used for regeneration of the Makefiles and configure script.

3.2 Modern Windows (XP...Win7) compilation

Download dibbler-0.8.2-src.tar.gz and extract it. In `Port-win32` there are several project files (for server, client and relay) for MS Visual Studio 2008. According to authors knowledge, it is possible to com-

pile dibbler using free MS Visual C++ Express 2008 edition. Previous dibbler releases were compiled using MS Visual Studio .NET (sometimes called 2002) and 2003. Those versions are not supported anymore. It might work with newest dibbler version, but there are no guarantee. Open `dibbler-win32.vs2008.sln` solution file click Build command. That should start compilation. After a while, binary exe files will be stored in the `Debug/` or `Release/` directories.

3.3 Legacy Windows (NT/2000) compilation

Windows NT4/2000 port is considered experimental, but there are reports that it works just fine. To compile it, you should download dev-cpp (<http://www.bloodshed.net/dev/devcpp.html>), a free IDE for Windows utilising minGW port of the gcc for Windows. Run dev-cpp, click „open project...”, and open one of the *.dev files located in the Port-winnt2k directory, then click compile. You also should take a look at `Port-winnt2k/INFO` file for details.

3.4 IPv6 support

Some systems does not have IPv6 enabled by default. In that is the case, you can skip following subsections safely. If you are not sure, here is an easy way to check it. To verify if you have IPv6 support, execute following command: `ping6 ::1` (Linux) or `ping ::1` (Windows). If you get replies, you have IPv6 already installed.

3.4.1 Setting up IPv6 in Linux

Almost all modern Linux distributions have IPv6 enabled by default, so there is very good chance that nothing has to be done. However, if that is not the case, IPv6 can be enabled in Linux systems in two ways: compiled directly into kernel or as a module. If you don't have IPv6 enabled, try to load IPv6 module: `modprobe ipv6` (command executed as root) and try `ping6 ::1`. If that fails, you have to recompile kernel to support IPv6. There are numerous descriptions how to recompile kernel available on the web, just type "kernel compilation howto" in [Google](#).

3.4.2 Setting up IPv6 in Windows Vista and Win7

Both systems have IPv6 enabled by default. Also note that Win7 also has DHCPv6 client built-in, so you may use it as well.

3.4.3 Setting up IPv6 in Windows XP and 2003

If you have already working IPv6 support, you can safely skip this section. The easiest way to enable IPv6 support is to right click on the **My network place** on the desktop, select **Properties**, then locate your network interface, right click it and select **Properties**. Then click **Install...**, choose protocol and then IPv6 (its naming is somewhat different depending on what Service Pack you have installed). In XP, there's much quicker way to install IPv6. Simply run command `ipv6 install` (i.e. hit Start..., choose run... and then type `ipv6 install`). Also make sure that you have built-in firewall disabled. See *Frequently Asked Question* section for details.

3.4.4 Setting up IPv6 in Windows 2000

If you have already working IPv6 support, you can safely skip this section. The following description was provided by Sob ([sob\(at\)hisoftware.cz](mailto:sob(at)hisoftware.cz)). Thanks. This description assumes that ServicePack 4 is already installed.

1. Download the file `tpipv6-001205.exe` from: <http://msdn.microsoft.com/downloads/sdks/platform/tpipv6.asp> and save it to a local folder (for example, `C:\IPv6TP`).

2. From the local folder (C:\IPv6TP), run `Tpipv6-001205.exe` and extract the files to the same location.
3. From the local folder (C:\IPv6TP), run `Setup.exe -x` and extract the files to a subfolder of the current folder (for example, C:\IPv6TP\files).
4. From the folder containing the extracted files (C:\IPv6TP\files), open the file `Hotfix.inf` in a text editor.
5. In the [Version] section of the `Hotfix.inf` file, change the line `NTServicePackVersion=256` to `NTServicePackVersion=1024`, and then save changes.³
6. From the folder containing the extracted files (C:\IPv6TP\files), run `Hotfix.exe`.
7. Restart the computer when prompted.
8. After the computer is restarted, from the Windows 2000 desktop, click Start, point to Settings, and then click Network and Dial-up Connections. As an alternative, you can right-click My Network Places, and then click Properties.
9. Right-click the Ethernet-based network interface to which you want to add the IPv6 protocol, and then click Properties. Typically, this network interface is named Local Area Connection.
10. Click Install.
11. In the Select Network Component Type dialog box, click Protocol, and then click Add.
12. In the Select Network Protocol dialog box, click Microsoft IPv6 Protocol and then click OK.
13. Click Close to close the Local Area Connection Properties dialog box.

3.4.5 Setting up IPv6 in Windows NT4

If you have already working IPv6 support, you can safely skip this section. The following description was provided by The following description was provided by Sob ([sob\(at\)hisoftware.cz](mailto:sob@hisoftware.cz)). Thanks.

1. Download the file `msripv6-bin-1-4.exe` from: <http://research.microsoft.com/msripv6/msripv6.htm> Microsoft and save it to a local folder (for example, C:\IPv6Kit).
2. From the local folder (C:\IPv6Kit), run `msripv6-bin-1-4.exe` and extract the files to the same location.
3. Start the Control Panel's "Network" applet (an alternative way to do this is to right-click on "Network Neighborhood" and select "Properties") and select the "Protocols" tab.
4. Click the "Add..." button and then "Have Disk...". When it asks you for a disk, give it the full pathname to where you downloaded the binary distribution kit (C:\IPv6Kit).
5. IPv6 is now installed.

³This defines Service Pack requirement. `NTServicePackVersion` is a ServicePack version multiplied by 256. If there would be SP5 available, this value should have been changed to the 1280.

4 Features HOWTO

This section contains information about setting up various Dibbler features. Since this section was added recently, it is not yet comprehensive. That is expected to change.

4.1 Prefix delegation

Prefix delegation is a mechanism that allows two routers to delegate (“assign”) prefixes in similar way as server can delegate (“lease”) addresses to hosts. As specified in [6]: *The prefix delegation mechanism is intended for simple delegation of prefixes from a delegating router to requesting routers. It is appropriate for situations in which the delegating router does not have knowledge about the topology of the networks to which the requesting router is attached, and the delegating router does not require other information aside from the identity of the requesting router to choose a prefix for delegation. For example, these options would be used by a service provider to assign a prefix to a Customer Premise Equipment (CPE) device acting as a router between the subscriber's internal network and the service provider's core network.*

To configure server to provide prefixes, a pool must be defined and also client prefixes' length. For example section below assigns 2001:db8::/32 pool to be managed by this server. From this pool, server will assign /48 prefixes to the clients. For example, client can receive prefix 2001:db8:7c34::/48.

```
pd-class {  
    pd-pool 2001:db8::/32  
    pd-length 48  
}
```


As a general rule, server will provide random prefix to a client, unless client provided a hint. The full prefix assignment algorithm is as follows:

1. client didn't provide any hints: one prefix from each pool will be granted
2. client has provided hint and that is valid (supported and unused): requested prefix will be granted
3. client has provided hint, which belongs to supported pool, but this prefix is used: other prefix from that pool will be assigned
4. client has provided hint, but it is invalid (not belonging to a supported pool, multicast or link-local): see point 1

Dibbler implementation supports prefix delegation, as specified in [6]. Up to and including 0.7.3 version, client was also capable to do non-standard tricks with delegated prefix if it was a host, rather than router. This mode of operation was removed in 0.8.0RC1. Now client behaves the same way, regardless if it is a host or a router. When client receives prefix on one interface (e.g. prefix 2000:1234:7c34::/48 received on eth0) it will generate subprefixes for all other interfaces, which are up, running, non-loopback and multicast capable. In the example depicted on Fig. 4.1, received prefix was split into 3 prefixes: 2000:1234:7c34:1000::/56 for eth1, 2000:1234:7c34:2000::/56 for eth2 and 2000:1234:7c34:3000::/56 for eth3. Client support for prefix delegation was improved in 0.8.2. Client is now able to handle prefixes of arbitrary lengths (do not have to be divisible by 8 anymore). The only restriction is that prefix must be shorter or equal 120 bits.

It is also possible to explicitly specify which interfaces are downlink (i.e. sub-prefixes should be assigned to). *downlink-prefix-ifaces* command may be used to disable interface autoselection and just list downlink interfaces.

It is also possible to define multiple prefix pools. See section 5.1.13 for simple prefix delegation configuration for server or section 5.1.14 for multiple prefixes configuration. Also section 6.8.11 provides information related to client configuration.

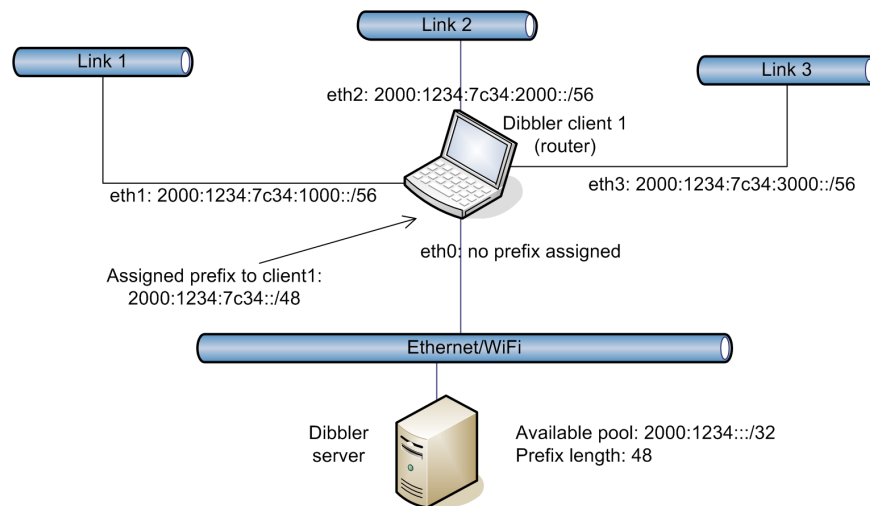Figure 4: *Prefix delegation (router behaviour)*

4.2 Relays

In small networks, all nodes (server, hosts and routers) are connected to the same network segment – usually Ethernet segment or a single access point or hotspot. This is very convenient as all clients can reach server directly. However, larger networks usually are connected via routers, so direct communication is not always possible. On the other hand it is useful to have one server, which supports multiple links – some connected directly and some remotely.

Very nice feature of the relays is that they appear as actual servers from the client's point of view. Therefore no special arrangement or configuration on the client side is required. On the other hand, from the administrator point of view, it is much easier to manage one DHCPv6 server and deploy several relays than manage several servers on remote links.

It is important to understand that relays not simply forward DHCPv6 messages. Each message forwarded from client to the server is encapsulated. Also each message forwarded from server to a client is decapsulated. Therefore additional server configuration is required to deal with encapsulated (i.e. relayed) traffic.

To avoid confusion during reference to a specific link (i.e. eth0 on the relay may be different link than eth0 on the server), each link must be referred to using its unique interface-id. It is essential to use the same identifier in the relay configuration as well as in the server, so both will refer to the same link using the same number. See section 5.1.8 for example how to configure server and section 7.4.1 for corresponding relay configuration.

In larger networks it is sometimes useful to connect multiple relays. Assuming there are 2 relays connecting server and client. Such scenario is depicted on figure 6. Requests from client are received by relay2, which encapsulates and sends them to relay1. Relay1 further encapsulates those messages and sends them to the server. Since server receives double encapsulated messages, it must be properly configured to support such traffic. See section 5.1.9 for details about server configuration and section 7.4.4 for example relays configuration.

4.3 Routing configuration

Until recently, DHCPv6 protocol did not define a way to provision routing configuration information to clients and relay or Router Advertisement mechanism of Neighbor Discovery protocol [15]. While that approach works, it brings a number of drawbacks. In particular:

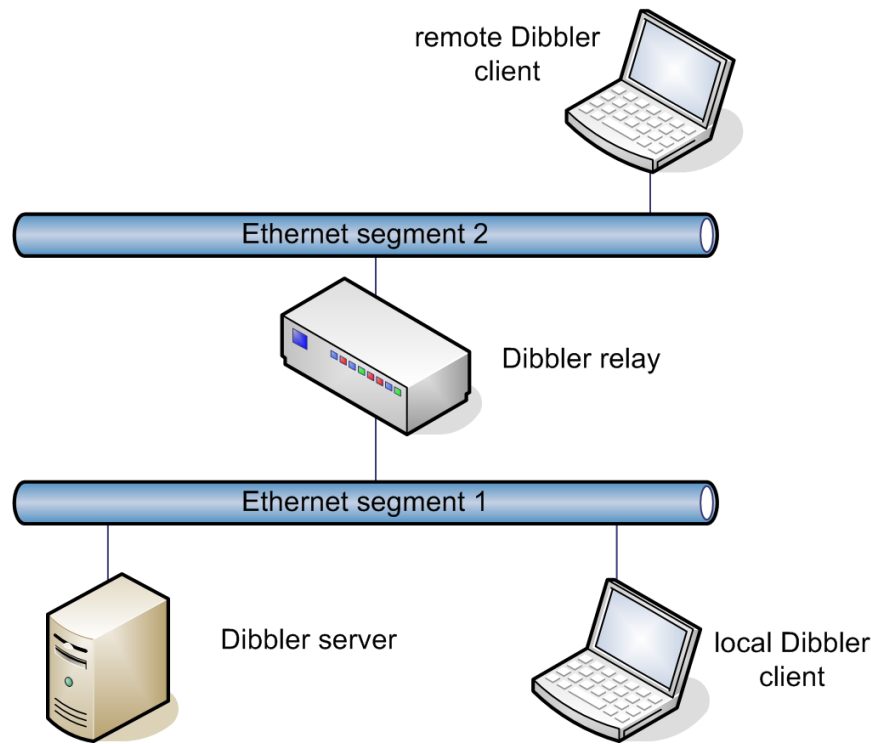



Figure 5: *Relay deployment*

1. RA sent by router affects all hosts in a network. There is no way to differentiate this information on a per host basis. There is no way to define additional routing information for specified class of hosts (e.g. one department in a corporate network).
2. RA and DHCPv6 configuration has to be consistent. That is very doable, but somewhat problematic, because network configuration has to be specified in several places. Moreover, it does not scale too well. There are routers located in every segment of a network, while there may be just a single DHCPv6 server deployed that serves many links.
3. Administrators experienced with IPv4 that are migrating their networks to IPv6 ask this question very frequently: “How do I configure routing?”. Until recently the proper answer to that question was “you don’t”.
4. In mobile environment, mobile nodes had to wait for RA and then start DHCPv6 exchange. Although hosts can request RA by sending Router Solicitation (RS), that may sometimes not work, as routers have upper limits of how many RA they are allowed to sent.

To solve aforementioned problems, a DHCPv6-based solution was proposed [23]. It allows provisioning of IPv6 routing information. In particular, it allows configuration of a default route, any reasonable number of specific routes and routes available on link. This feature was introduced in Dibbler 0.8.1RC1. Both server and client support it. Dibbler sources come with examples config files. See `doc/example/server-route.conf` and `doc/example/client-route.conf` for details.

Note: This specification is not approved yet. It will change in the future. In particular, IANA have not assigned specific option values yet. Dibbler currently uses 242 for NEXT_HOP and 243 for RTPREFIX options. Those values will change.

Note: Current implementation is a prototype. It does support only one route per router, only one router and only a single route on-link. Although server is able to parse config that defines more than one,

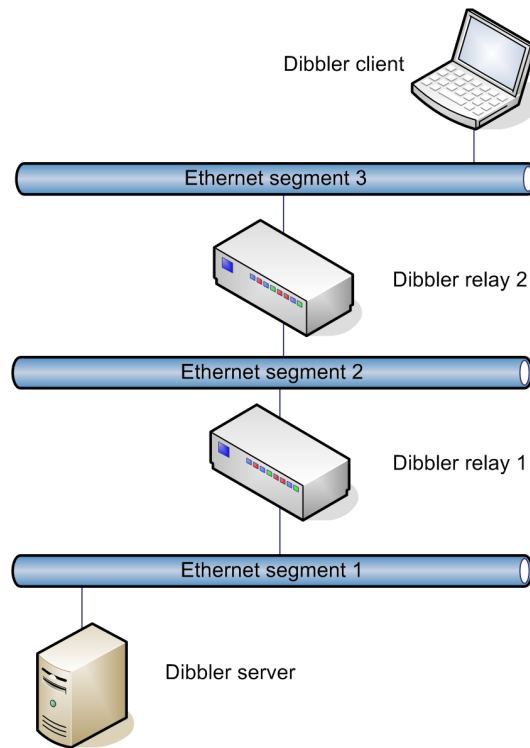Figure 6: *Cascade relays*

it will provision only the first route or router information to a client. That is implementation limitation that will be removed in future releases. That is not a spec limitation.

To configure routing on a server side, following config may be used

```
# Example server configuration file: server-route.conf

iface "eth0" {
# assign addresses from this pool
  class {
    pool 2000::/64
  }

# router with a single route with infinite lifetime
  next-hop 2001:db8:1::face:b00c {
    # replace this with ::/0 to configure default route
    route 2001:db8:1::/64
  }

# a single next-hop without any routes defined (i.e. default router)
# This simplified mode is recommended only in bandwidth restricted
# networks. Please use full mode instead
# next-hop 2001:db8:1::cafe

# router with 3 routes defined in different ways
  next-hop 2001:db8:1::dead:beef {
```

```
# route may have defined a lifetime
route 2001:db8:2::/64 lifetime 7200
# lifetime may be infinite
# route 2001:db8:3::/64 lifetime infinite
}

# prefixes available on link directly, not via router
route 2001:db8:5::/64 lifetime 3600
}
```

Support on client's side is enabled in a very simple way:

```
# Example client configuration file: client-route.conf

# Uncomment following line to skip confirm sending (after crash or power outage)
skip-confirm

# 7 = omit debug messages
log-level 8

# Uncomment this line to run script every time response is received
script "/var/lib/dibbler/client-notify.sh"

iface "eth0" {
    ia

    option dns-server
    option domain
    routing 1
}
```

Two features should be enabled to reasonably use this feature. **routing 1** instructs client that it should request routing information (NEXT_HOP and RTPREFIX options). Once such information is sent by the server, client will execute a notify script. Client will run defined script and pass necessary information to it. In particular, it will set **OPTION_NEXT_HOP**, **OPTION_NEXT_HOP_RTPREFIX** and **OPTION_RTPREFIX** variables with contents of received option. Please see scripts/notify-scripts/client-notify.sh for example on how to use that information to configure routing. User is also recommended to read Section 4.7 about details of running a script and passed variables.

4.4 Custom options

Dibbler is the DHCPv6 with support for a very large number of options. However, there are always some new options that are not yet supported. Another case is that vendors sometimes want to develop and validate their private options before formal standardisation process takes place. Starting with 0.8.0RC1, both client and server are able to handle custom options. Even though author tries to implement support for as many options as possible, there are always cases, when that is not enough. Some users may also test out new ideas, before they get standardized. Currently only several option layouts are supported, but that list is going to be expanded. Server is able to support following extra formats: generic (defined by hex string), IPv6 address, IPv6 address list and string (domain). To define those options, use the following format:

```
#server.conf
```

```
iface "eth0" {  
  
    class {  
        pool 2001:db8:1::/64  
    }  
  
    option 145 duid 01:02:a3:b4:c5:dd:ea  
    option 146 address 2001:db8:1::dead:beef  
    option 147 address-list 2001:db8:1::aaaa,2001:db8:1::bbbb  
    option 148 string "secretlair.example.org"  
}
```

Similar list can be configured for client. However, client can ask for such custom options for testing purposes only, as mechanism for handling those options once received is not yet implemented, as of 0.8.0RC1. Consider it experimental for the time being. Client can request for an option using *ORO* option or even send the option in its messages.

Note that in 0.8.2 formatting of DUID-style options has changed. “DUID” keyword is now required.

```
#client.conf  
iface "eth0" {  
    unicast 1  
    ia  
  
    option 145 duid 01:02:a3:b4:c5:dd:ea  
    option 146 address 2001:db8:1::dead:beef  
    option 147 address-list 2001:db8:1::aaaa,2001:db8:1::bbbb  
    option 148 string "secretlair.example.org"  
  
    option 149 string request  
    option 150 address request  
    option 151 address-list request
```

A word of warning: There are no safety checks regarding option codes, so it is possible to transmit already defined options using this feature. Use with caution!

4.5 DNS Update

During normal operation, DHCPv6 client receives one or more IPv6 address(es) from DHCPv6 server. If configured to do so, it can also receive information about DNS server addresses. As an additional service, DNS Update can be performed. This feature, sometimes known as Dynamic DNS, keeps DNS entries up to date. When client boots, it gets its fully qualified domain name and this name can be used to reach this particular client by other nodes. Details of this mechanism is described in [13].

Note: In this section, we will assume that hostnames will be used from the example.com domain and that addresses will be provided from the 2000::/64 pool.

There are two types of the DNS Updates. First is a so called forward resolving. It allows to change a node's name into its address, e.g. malcolm.example.com can be translated into 2000::123. Other kind of record, which can be updated is a so called reverse resolving. It allows to obtain full name of a node with know address, e.g. 2000::124 can be translated into zoe.example.com.

To configure this feature, following steps must be performed:

1. Configure DNS server. DNS server supporting IPv6 and dynamic updates must be configured. One example of such server is an excellent [ISC BIND](#) software. Version used during writing of this

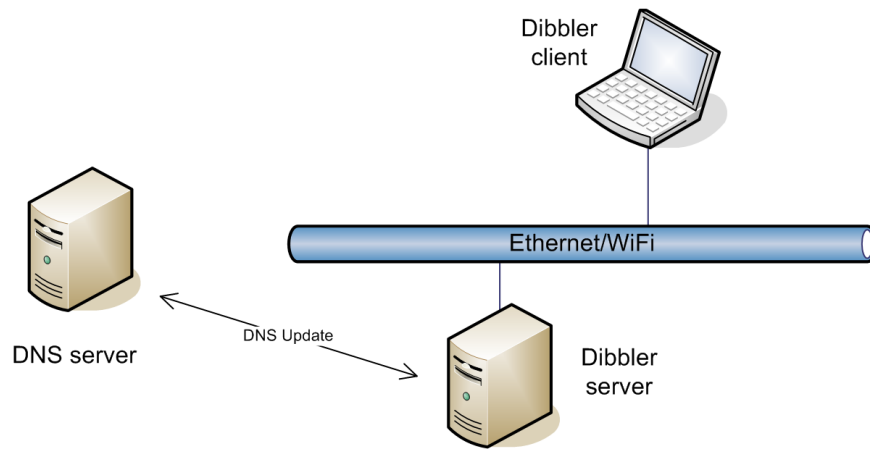


Figure 7: *DNS Update (performed by server)*

documentation was BIND 9.7.2. It is necessary to allow listening on the IPv6 sockets and define that specific domain can be updated. See example below.

2. Configure Dibbler server to provide DNS server informations for clients. DNS Updates will be sent to the first DNS server on the list of available servers.
3. Configure Dibbler server to work in stateful mode, i.e. that it can provide addresses for the clients. This is a default mode, so unless configuration was altered, this step is already done. Make sure that there is no „stateless” keyword in the `server.conf` file.
4. Define list of the available names in the server configuration file. Make sure to use fully qualified domain names (e.g. `malcolm.example.com`), not the hostnames only.
5. Configure dibbler client to request for DNS Update. Use „option fqdn” to achieve this.
6. Server can be configured to execute
 - both (AAAA and PTR) updates by itself
 - execute PTR only by itself and let client execute AAAA update
 - don't perform any updates and let client perform AAAA update.


Note that only server is allowed to perform PTR updates. After configuration, client and/or server should log following line, which informs that Dynamic DNS Update was completed successfully.

As of 0.8.0, both Dibbler server and client are using TCP connection for DNS Updates. Connections are established over IPv6. There is no support for IPv4 connections. Server uses first DNS server address specified in `dns-server` option. It is possible to use differentiate between DNS addresses provided to clients and the one used for DDNS. To override DNS updates to be performed to different address, use the following command:

```
fqdn-ddns-address 2001:db8:1::1
```

4.5.1 Example BIND configuration

Below are example configuration files for the [ISC BIND 9.7.2](#), developed by [Internet Systems Consortium, Inc.](#). First is a relevant part of the `/etc/bind/named.conf` configuration file. Generally, support for

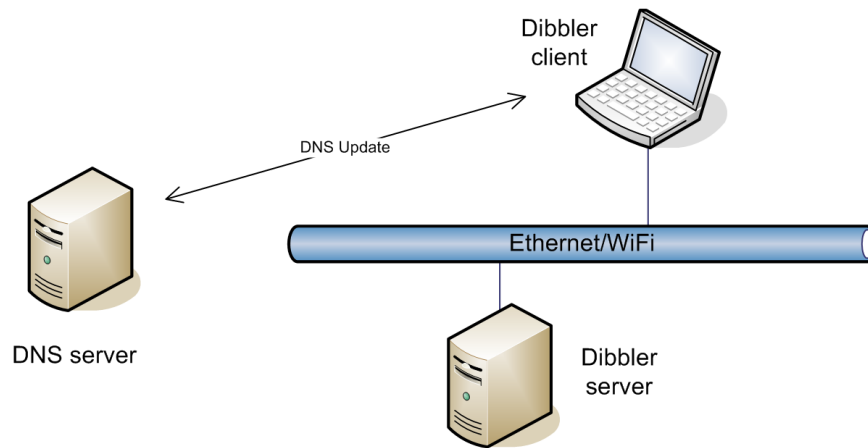Figure 8: *DNS Update (performed by client)*

IPv6 in BIND is enabled (`listen-on-v6`) and there are two zones added: `example.com` (normal domain) and `0.0.0.0.0.0.0.0.0.0.0.0.0.0.2.ip6.arpa` (reverse mapping). Corresponding files are stored in `example.com` and `rev-2000` files. For details about meaning of those directives, please consult *BIND 9 Administrator Reference Manual*.

Note: Provided configuration is not safe from the security point of view. See next subsection for details.

```
// part of the /etc/bind/named.conf configuration file
options {
    listen-on-v6 { any; };
    listen-on   { any; };

    // other global options here
    // ...
};

zone "example.com" {
    type master;
    file "example.com";
    allow-update { any; };
    allow-transfer { any; };
    allow-query  { any; };

    // other example.com domain-specific
    // options follow
    // ...
};

zone "0.0.0.0.0.0.0.0.0.0.0.0.0.0.2.ip6.arpa" {
    type master;
    file "rev-2000";
    allow-update { any; };
    allow-transfer { any; };
    allow-query  { any; };
};
```

```
// other 2000::/64 reverse domain related
// options follow
// ...
};
```

Below are examples of two files: forward and reverse zone. First example presents how to configure normal domain. As an example there is entry provided for zoe.example.com host, which has 2000::123 address. Note that you do not have to manually configure such entries – dibbler will do this automatically. It was merely provided as an example, what kind of mapping will be done in this zone.

```
;
$ORIGIN .
$TTL 86400      ; 1 day
example.com     IN SOA v13.klub.com.pl. root.v13.klub.com.pl. (
                                129      ; serial
                                7200     ; refresh (2 hours)
                                3600     ; retry (1 hour)
                                604800   ; expire (1 week)
                                86400    ; minimum (1 day)
                                )
                NS      v13.klub.com.pl.
                A       1.2.3.4
                TXT     "Fake domain used for Dibbler tests."
$ORIGIN example.com.
$TTL 7200       ; 2 hours
zoe             AAAA    2000::123
```

Second example presents zone file for reverse mapping. It contains entries for a special zone called 0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.2.ip6.arpa. This zone represents 2000::/64 address space. As an example there is a static entry, which maps address 2000::999 to a canonical name kaylee.example.com. Note that you do not have to manually configure such entries – dibbler will do this automatically. It was merely provided as an example, what kind of mapping will be done in this zone.

```
; rev-2000 example file
$ORIGIN .
$TTL 259200    ; 3 days

; this line below is split in two due to page with limitation
0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.2.ip6.arpa IN
    SOA 0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.2.ip6.arpa. hostmaster.ep.net. (
; this line above is split in two due to page with limitation
                                200608268 ; serial
                                86400     ; refresh (1 day)
                                1800      ; retry (30 minutes)
                                172800    ; expire (2 days)
                                259200    ; minimum (3 days)
                                )
                NS      klub.com.pl.
$ORIGIN 0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.2.ip6.arpa.
$TTL 86200     ; 23 hours 56 minutes 40 seconds
3.2.1         PTR   picard.example.com.
```


[illegible]

Note: Due to page width limitation, if the example above, two lines were split.

4.5.2 Dynamic DNS Testing and tips

Proper configuration of the DNS Update mechanism is not an easy task. Therefore this section provides description of several methods of testing and tuning BIND configuration. Please review following steps before reporting issues to the author or on the mailing list.

- See example server and client configuration files described in a sections [6.8.7](#) and [5.1.10](#). Also note that Dibbler distribution should be accompanied with several example configuration files. Some of them include FQDN usage examples.
- Make sure that unix user, which runs BIND, is able to create and write file example.com.jnl. When BIND is unable to create this journal file, it will fail to accept updates from dibbler and will report failure. Check BIND log files, which are usually stored in the `/var/log/` directory.
- Make sure that you have routing configured properly on a host, which will attempt to perform DNS Update. Use `ping6` command to verify that DNS server is reachable from this host.
- Make sure that your DNS server is configured properly. To do so, you might want to use `nsupdate` tool. It is part of the BIND distribution, but it is sometimes distributed separated as part of the `dnsutils` package. After executing `nsupdate` tool, specify address of the DNS server (**server** command), specify update parameters (**update** command) and then type **send**. If `nsupdate` return a command prompt, then the update was successful. Otherwise `nsupdate` will print DNS server's response, e.g. NOTAUTH of SRVFAIL. See below for examples of successful forward (AAAA record) and reverse (PTR record) updates.
- After DNS Update is performed, DNS records can be verified using `dig` command line tool (a part of the `dnsutils` package). Command syntax is: `dig @(dns-server-address) name record-type`. In the following example, this query checks for name `jayne.example.com` at a server located at `2000::1` address. Record type AAAA (standard record for resolving name into IPv6 address) is requested. `dig` tool provides server's response in the **ANSWER SECTION:**. See example log below.
- In example BIND configuration above, zone transfers, queries and updates are allowed from anywhere. To make this configuration more secure, it might be a good idea to allow updates only from a certain range of addresses or even one (DHCPv6 server's) address only.

To manually make AAAA record update, type:

```
nsupdate
>server 2000::1
>update add worf.example.com 7200 IN AAAA 2000::567
>send
```



```
# also server will use this address to perform DNS Update,
# so it must be valid and DNS server must accept DNS Updates.
option dns-server 2000::1

# provide their domain name
option domain example.com

# provide fully qualified domain names for clients
# note that first, second and third entry is reserved
# for a specific address or a DUID

option fqdn 1 64
    zebuline.example.com - 2000::1,
    kael.example.com - 2000::2,
    wash.example.com - 0x0001000043ce25b40013d4024bf5,
    zoe.example.com,
    malcolm.example.com,
    kaylee.example.com,
    jayne.example.com,
    inara.example.com

# specify what to do with client's names that are not on the list
# 0 - reject
# 1 - send other name from allowed list
# 2 - accept any name client sends
# 3 - accept any name client sends, but append specified domain suffix
# 4 - ignore client's hint, generate name based on his address, append domain name

accept-unknown-fqdn 4 foo.bar.pl

}
```

4.6 Introduction to client classification

It is possible to define more than one address class for a single interface. Normally, when a client asks for an address, one of the classes is being chosen on a random basis. If not specified otherwise, all classes have equal probability of being chosen. However there are cases where an Administrator wants to restrict access to a given pool or to have distinct "client classes" associated to different address pools. For example, Computer and IP-Telephone terminals can coexist in the same LAN ; but the Computer must belong to given class pool meanwhile the IP-Telephone must belong to another pool.

In order to implement the Client Class Classification, you must first create the client class and then in the class declaration, indicate which class to be allowed or denied. This point will be discussed in detail in next sections.

4.6.1 Client class declaration

Each client class used for class / ta / pd addressing must be defined in the server configuration file at global scope. A client-class declaration looks like this:

```
Client-class TelephoneClass{
```

```
        match-if ( client.vendor-spec.en == 1234567)
    }
```

Where TelephoneClass denotes the name of the client class and the (client.vendor-spec.en == 1234567) denotes the condition an incoming message shall match to belong to the Client-Class. The supported operator and data will be discussed in next section.

4.6.2 Access control

Access control is based on a per pool basis. In the client-class declaration; you can deny or allow the client class by using the keyword "allow" or "deny". For example, following class accepts all clients except those belonging to the client class "TelephoneClass":

```
class {
    2000::/64
    deny TelephoneClass
}
```

Another example. This class accepts only client belonging to the client class "TelephoneClass".

```
class {
    2000::/64
    allow TelephoneClass
}
```

The rule can also be applied to TA/PD declaration. Several "allow" directives can be associated to a given pool.

```
ta-class {
    pool 2000::/64
    deny TelephoneClass
}

pd-class {
    pd-pool 2000::/80
    pd-length 96
    deny TelephoneClass
}
```

4.6.3 Assigning clients to defined classes

Classifying operators are used for assigning client to a specific class. Currently, Dibbler supports the following Operators for classifying clients:

Equal operator

```
Syntax : ( Expr1 == Expr2 )
Scope : global
Purpose : returns "true" if Expr1 equals Expr2
```

And Operator

```
Syntax : ( Condition1 and Condition2 )
Scope : global
Purpose : returns "true" if both Condition1 and Condition2 are "true"
```

```
Or operator
  Syntax : ( Condition1 or Condition2 )
  Scope : global
  Purpose : returns "true" if either Condition1 or Condition2 is "true"
```

```
Contain Operator
  Syntax : ( String1 contain String2 )
  Scope : global
  Purpose : returns "true" if String2 is a substring of String1
```

```
Substring Operator
  Syntax substring ( Expr1, index, length )
  Scope : global
  Purpose : returns the substring of the result of that evaluation
            that starts index characters from the beginning, continuing for
            length characters.
```

Dibbler accepts different data expressions – or variables – which reflect value of options found in the packet to which the server is responding.

client.vendor-spec.en the enterprise number value of OptionVendorSpecific (OPTION_VENDOR_OPTS, option value equals to 17 as per RFC3315)

client.vendor-spec.data the data of OptionVendorSpecific (OPTION_VENDOR_OPTS, option value equals to 17 as per RFC3315)

client.vendor-class.en the enterprise number value of OptionVendorClass (OPTION_VENDOR_CLASS, option value equal to 16 as per RFC3315)

client.vendor-class.data the data of OptionVendorClass (OPTION_VENDOR_CLASS, option value equals to 16 as per RFC3315)

4.6.4 Examples of Client-Class Classifying

Example 1 :

```
Client-class CPEClass {
    match-if ( client.vendor-spec.data contain CPE )
}
```

Client belongs to CPEClass if its request message contains the Vendor Specific option with the data field including the substring "CPE".

Example 2 : Combination with AND operator

```
Client-class TelephoneClass {
    match-if (( client.vendor-spec.en == 1234) and ( client.vendor-spec.data contain CPE ) )
}
```

Example 3 : Combination with OR operator

```
Client-class TelephoneClass {
    match-if (( client.vendor-spec.en == 1234) or ( client.vendor-spec.data contain CPE ) )
}
```

4.7 External script

Note: Support for external scripts (often called *notify script* was rewritten in 0.8.1RC1 release. Note that mapping prefix and notify scripts were removed. Support for server-side script was introduced in 0.8.1RC1.

Dibbler-client is able to receive addresses, prefixes and numerous additional options. It will do its best to set up those parameters in the system. However, the need for some extra processing may arise. The most elegant solution is to call external script every time the configuration changes. Dibbler client may be configured to call external script every time REPLY is received for REQUEST (new parameters added), RENEW (parameters were updated) or RELEASE (parameters were deleted).

Name of this script is specified using `script` keyword followed by absolute path to script. Script will be called with a single parameter, denoting current operation. Its value will be one of “add”, “update”, “delete” or “expire”. Currently “expire” event is triggered on server-side only.⁴ Actual values of received parameters are passed as environment variables. In particular, IFNAME and IFINDEX variables denote interface name and interface index that was used to communicate with server, respectively. Another essential variable set is REMOTE_ADDR. It defines address from which packet originated. That is client's address (when run on server) and server's address (when run on client). Client's message type is passed in CLNT_MESSAGE variable. Server's response is passed in SRV_MESSAGE. Note that server's reply is most often REPLY as script execution is skipped after sending ADVERTISE.

Addresses are passed in variables ADDR1, ADDR2 and following. Note that each ADDR variable is accompanied with two additional variables: ADDR1PREF (address preferred lifetime) and ADDR1VALID (address valid lifetime). Prefixes are passed in variables PREFIX1, PREFIX2 and following. Note that each PREFIX variable is accompanied with three additional variables: PREFIX1LEN (prefix length), PREFIX1PREF (prefix preferred lifetime), and PREFIX1VALID (prefix valid lifetime). Support for additional options is in progress. Options are passed as environment variables. For example client DUID (conveyed in option code 1), will be passed as OPTION1.

To enable script execution, `script` global option must be added to `client.conf` file. For example:

```
# client.conf
script /var/lib/dibbler/script.sh

iface eth0 {
    ia
}
```

4.8 Confirm

Client detects if previous client instance was not shutdown properly (due to power outage, client crash, forceful shutdown or similar event). In such case, it reads existing address database and checks if assigned addresses may still be valid. If that is so, it tries to confirm those addresses by using *CONFIRM* message.

If you want to provoke this kind of scenario on purpose, you can run dibbler-client normally, then forcefully kill the process (by sending kill -9 signal, or pressing ctrl-c under Linux). Make sure that you rerun client before address valid lifetime expires.

Currently, client does support only IAs in the *CONFIRM*.

4.9 Mobility

Client can also be compiled with support for link change detection. The intended use for this feature is mobility. Client is able to detect when it moves to new link and react accordingly. Client sends *CONFIRM* message to verify that its currently held address is still usable on this new link.

⁴Please send your feedback to mailing list if you need it also on client-side.

4.10 Leasequery

Servers provide addresses, prefixes and other configuration options to the clients. Sometime administrators may want to obtain information regarding certain leases, e.g. who has been given a specific address or what addresses have been assigned to a specific client. This mechanism is called Leasequery [16]. New DHCPv6 participant called requestor has been defined. Its sole purpose is to send queries and receive responses. Dibbler provides example implementation. To define a query, command line parameters are used.

There are two types of queries: by address ("who leases this address?") and by client identifier ("what addresses has this client?"). To specify one of such types, **-addr** or **-duid** command-line switches can be used. It is also mandatory to specify (using **-i IFACE**), which interface should be used to transmit the query.

Here is a complete list of all command-line switches:

-i IFACE – defines thru which interface should the query be sent

-addr ADDR – sets query type to query by address. Also defines address, which the query will be about.

-duid DUID – sets query type to query by client identifier. Also defines client identifier.

-timeout SECS – specifies time, which requestor should wait for response.

-dstaddr ADDR – destination address of the lease query message. By default messages are sent to the multicast address (ff02::1:2). To transmit query to an unicast address, use this option.

Example query 1: Who has 2000::1 address?

```
dibbler-requestor -i eth0 -addr 2000::1
```

Example query 2: Which addresses are assigned to client with specific client identifier?

```
dibbler-requestor -i eth0 -duid 00:01:00:01:0e:8d:a2:d7:00:08:54:04:a3:24
```

4.11 Stateless vs stateful and IA, TA options

This section explains the difference between stateless and stateful configurations. IA and TA options usage is also described.

Usually, normal stateful configuration based on non-temporary addresses should be used. If you don't know, what temporary addresses are, you don't need them.

Note that DHCPv6 stateless autoconfiguration is part of stateless autoconfiguration defined in [15].

There are two kinds of configurations in DHCPv6 ([3], [8]):

stateful – it assumes that addresses (and possibly other parameters) are assigned to a client. To perform this kind of configuration, four messages are exchanged: *SOLICIT*, *ADVERTISE*, *REQUEST* and *REPLY*.

stateless – when only parameters are configured (without assigning addresses to a client). During execution of this type of configuration, only two messages are exchanged: *INF-REQUEST* and *REPLY*.

During normal operation, client works in a stateful mode. If not instructed otherwise, it will request one or more normal (i.e. non-temporary) address. It will use *IA* option (Identity Association for Non-temporary Addresses, see [3] for details) to request and retrieve addresses. Since this is a default behavior, it does not have to be mentioned in the client configuration file. Nevertheless, it can be provided:

```
# client.conf
iface eth0 {
    ia
    option dns-server
}
```

In a specific circumstances, client might be interested in obtaining only temporary addresses. Although this is still a stateful mode, its configuration is slightly different. There is a special option called *TA* (Identity Association for Temporary Addresses, see [3] for details). This option will be used to request and receive temporary addresses from the client. To force client to request temporary addresses instead of permanent ones, *ta* keyword must be used in client.conf file. If this option is defined, only temporary address will be requested. Keep in mind that temporary addresses are not renewed.

```
# client.conf
iface eth0 {
    ta
    option dns-server
}
```

It is also possible to instruct client to work in a stateless mode. It will not ask for any type of addresses, but will ask for specific non-address related configuration parameters, e.g. DNS Servers information. This can be achieved by using **stateless** keyword. Since this is a global parameter, it is not defined on any interface, but as a global option.

```
# client.conf
stateless
iface eth0
{
    option dns-server
}
```

Some of the cases mentioned above can be used together. However, several combinations are illegal. Here is a complete list:

none – When no option is specified, client will assume one IA with one address should be requested. Client will send **ia** option (stateful autoconfiguration).

ia – Client will send **ia** option (stateful autoconfiguration).

ia,ta – When both options are specified, client will request for both - Non-temporary as well as Temporary addresses (stateful autoconfiguration).

stateless – Client will request additional configuration parameters only and will not ask for addresses (stateless autoconfiguration).

stateless,ia – This combination is not allowed.

stateless,ta – This combination is not allowed.

stateless,ia,ta – This combination is not allowed.

4.12 Server address caching

Previous Dibbler versions assigned a random address from the available address pool, so the same client received different address each time it asked for one. In the 0.5.0 release, new mechanism was introduced to make sure that the same client gets the same address each time. It is called *Server caching*.

Below is the algorithm used by the server to assign an address to the client.

- if the client provided hint, it is valid (i.e. is part of the supported address pool) and not used, then assign requested address.
- if the client provided hint, it is valid (i.e. is part of the supported address pool) but used, then assign free address from the same pool.
- if the client provided hint, but it is not valid (i.e. is not part of the supported address pool, is link-local or a multicast address), then ignore the hint completely.
- if the did not provide valid hint (or provided invalid one), try to assign address previously assigned to this client (address caching)
- if this is the first time the client is seen, assign any address available.

4.13 XML files

During its execution, all dibbler components (client, server and relay) store its internal information in the XML files. In Linux systems, they are stored in the `/var/lib/dibbler` directory. In Windows, current directory (i.e. directory where exe files are located) is used instead. There are several xml files generated. Since they are similar for each component, following list provides description for server only:

- `server-CfgMgr.xml` – Represents information read from a configuration file, e.g. available address pool or DNS server configuration.
- `server-IfaceMgr.xml` – Represents detected interfaces in the operating system, as well as bound sockets and similar information.
- `server-AddrMgr.xml` – This is database, which contains identity associations with associated addresses.
- `server-cache.xml` – Since caching is implemented by the server only, this file is only created by the server. It contains information about previously assigned addresses.

4.14 Authentication and Authorization

Implementation of authentication and authorization in Dibbler is loosely based on [19]. Mainly option formats have been used, for interoperability purposes. This means that there should be no reasonable expectation of interoperability with other implementations.

Draft does not specify how to communicate with home and foreign AAA servers (AAA-H and AAA-F) using Diameter or Radius protocol, so Dibbler uses a different, simpler approach. Keys are stored locally in files. (see Fig. 4.14).

For each pair of client and server three files are needed. Client uses a file `AAA-SPI`, which contains 32-bit AAA-SPI (AAA Security Parameter Index) — eight hexadecimal digits, to properly introduce himself (authorize) to server. Also it needs file named `AAA-key-AAASPI`, which contains a key that is used to generate authentication information in AAA-AUTH and AUTH options. The AAA-key is any number of arbitrary chosen bytes and is generated by administrator of DHCPv6 server. The server needs only one file per client to properly communicate using authentication. The file is named `AAA-key-AAASPI`, where

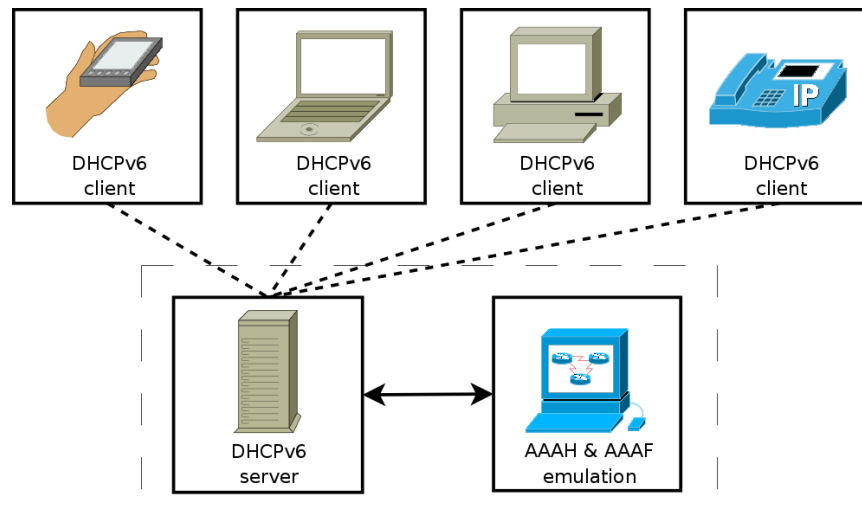


Figure 9: *Simplified model of AAA*

AAASPI is the same value, that client has in *AAA-SPI* file. This file contains the same AAA-key, that client has in *AAA-key* file. Dibbler searches for those files in *AAA directory*, which is `/var/lib/dibbler/AAA` when running under Linux and current directory, when running under Windows.

Typical scenario of preparing a client and server to use authentication:

1. Administrator generates *AAA-key-AAASPI* file. *AAASPI* is an arbitrary chosen 32-bit number (as described above). The file contains any AAA-key and can be administrator's favorite poem or can be simply generated using `dd` and `/dev/urandom`:

```
$ dd if=/dev/urandom of=AAA-key-b9a6452c bs=1 count=32
```

2. Administrator creates file *AAA-SPI* which contains previously chosen *AAASPI*. This file will be used by the client only.
3. Administrator transfers *AAA-SPI* and *AAA-key-AAASPI* to the client, using some secure method (e.g. mail+PGP, scp, https) to avoid sniffing the key by a potential attacker.
4. Client: User stores *AAA-SPI* and *AAA-key-AAASPI* in *AAA directory*.
5. Server: Administrator stores *AAA-key-AAASPI* in *AAA directory*.

For example, configuration files can look like this:

- Server's *AAA-key-b9a6452c* and client's *AAA-key* (32 bytes):

```
ma8s9849pujhaw09y4h[80pashydp80f
```

- Client's *AAA-SPI* (8 bytes):

```
b9a6452c
```

When configuration files are prepared and stored in client's and server's *AAA directory* you are ready to use authentication. For detailed description of possible options see 6.7. For quick start:

- set "auth-enabled true" in `client.conf`

- set “auth-method digest-hmac-sha256” in `server.conf`

See section 6.8.14 for example client configuration and 5.1.17 for server configuration.

4.15 Exceptions: per client configuration

All configuration parameters (except FQDN) are the same for all clients, e.g. all clients will receive the same domain name and the same DNS servers information.

However, it is sometimes useful to provide some clients with different configuration parameters. For example computers from the accounting department in a corporate network may be configured to be in a different subdomain. It is possible to specify that for particular client different configuration options should be provided. Each client is identified by its DUID. This mechanism is called *per client configuration*, but it is sometimes referred to as *exceptions*.

Note: This mechanism does not apply to prefix granting. Prefix delegation reservation will be implemented at a later date. If you need this feature, please contact author.

See section 5.1.12 for server configuration examples.

4.16 Vendor specific information

Dibbler supports vendor specific information options. As the name suggests, that option is specific to a particular vendor. To be able to support any vendor in a flexible manner, values are specified in a hex format in `server.conf`. For example:

```
option vendor-spec 1234-0x00002fedc
```

When client asks for a vendor-specific info, server will send vendor-specific info option with enterprise number set to 1234 and value option-data will be 00002fedc.

Although uncommon, it is also possible to specify multiple vendor options. Another `server.conf` example:

```
option vendor-spec 1234-0x00002fedc,5678-0x0002aaaa
```

Server algorithm for choosing, which vendor option should be sent, works as follows:

- When client requests for a specific vendor (i.e. sends *vendor-spec info* option with vendor field set), it will receive option for that specific vendor (i.e. requested 1234, got 1234).
- When client requests any vendor (i.e. sends only *option request* option with vendor-spec mentioned), it will receive first *vendor-spec info* option from the list (i.e. 5678/0002aaaa).
- When client requests for not supported vendor (i.e. 1111), it will receive first vendor-spec option from the list (i.e. 5678/0002aaaa).

It is possible to configure Dibbler client to ask for vendor-specific info. Granted value will not be used, so from the client's point of view this feature may be used as testing tool for the server. Client can request *vendor-specific information* option in one of the following ways:

option vendor-spec – Only *option request* option will be sent with *vendor-spec info* option mentioned.

option vendor-spec 1234 – *option request* option will be sent with *vendor-spec info* option mentioned, but also *vendor-spec info* option with enterprise number set to 1234 will be sent.

option vendor-spec 1234 0x0a0b0c0d – *option request* option will be sent with *vendor-spec info* option mentioned, but also *vendor-spec info* option with enterprise number set to 1234 and option-data will be sent.

Although that is almost never needed, it is possible to configure client to request multiple vendor-specific options at the same time. That is also supported by the server. See [6.8.9](#) for examples.

However, if client sends requests for multiple vendor-specific options, which are not supported by the server, for each sent option, server will assign one default vendor-spec option.

See [6.8.9](#) for client example and [5.1.11](#) for server examples.

4.17 Not connected interfaces (inactive-mode)

During normal startup, client tries to bind all interfaces defined in a configuration file. If such attempt fails, client reports an error and gives up. Usually that is best action. However, in some cases it is possible that interface is not ready yet, e.g. WLAN interface did not complete association. Dibbler attempt to detect link-local addresses, bind any sockets or initiate any kind of communication will fail. To work around this disadvantage, a new mode has been introduced in the 0.6.0RC4 version. It is possible to modify client behavior, so it will accept downed and not running interfaces. To do so, *inactive-mode* keyword must be added to `client.conf` file. In this mode, client will accept inactive interfaces, will add them to inactive list and will periodically monitor its state. When the interface finally goes on-line, client will try to configure it.

To test this mode, you can simulate deassociation using normal Ethernet interface. Issue following commands:

- Bring down your interface (e.g. `ifconfig eth0 down`)
- edit `client.conf` to enable `inactive-mode`
- execute client: `dibbler-client run`
- client will print information related to not ready interface, and will periodically (once in 3 seconds) check interface state.
- in a separate console, issue `ifconfig eth0 up` to bring the interface up.
- `dibbler-client` will detect this and will initiate normal configuration process.

In the 0.6.1 version, similar feature has been introduced on the server side. See sections [6.8.13](#) and [5.1.15](#) for configuration examples.

4.18 Parameters not supported by server (insist-mode)

Client can be instructed to obtain several configuration options, for example DNS server configuration or domain name. It is possible that server will not provide all requested options. Older versions of the dibbler client had been very aggressive in such case. It tried very hard to obtain such options. To do so, it did send *INF-REQUEST* to obtain such option. It is possible that some other DHCPv6 servers will receive this message and will reply with valid configuration parameters. This behavior has changed in the 0.6.0RC4 release. Right now when client does not receive all requested options, it will complain, but will take no action. To enable old behavior, so called *insist-mode* has been added. To enable this mode, add `insist-mode` at the global section of the `client.conf` file. Example configuration file is provided in the [6.8.12](#).

4.19 Different DUID types

There are 3 different types of the DUID (DHCP Unique Identifier):

- type 1 (link-layer + time) – this DUID is based on Link-layer address and a current timestamp. According to spec [\[3\]](#), that is a default type.

- type 2 (enterprise number) – this DUID is based on the Private Enterprise Number assigned to larger companies. Each vendor should maintain its own space of unique identifiers.
- type 3 (link-layer) – this DUID is based on link-layer address only.

According to spec [3], it is recommended to use link-layer + time, if possible. That DUID type provides most uniqueness. It has one major drawback – it is impossible to know DUID before it is actually generated. That poses significant disadvantage to sysadmins, who want to specify different configuration for each client. In such cases, it is recommended to switch to link-layer only (type 3) DUIDs.

During first executing dibbler-client will generate its DUID and store it in `client-duid` file on disk. During next startup DUID will be read from the file, not generated.

It is possible to specify, what DUID format should be used. It is worth noting that such definition is taken into consideration during DUID generation only, i.e. during first client execution. To specify DUID type, put only one of the following lines in the `client.conf` file:

```
# uncommend only ONE of the lines below
duid-type duid-llt
#duid-type duid-en 1234 0x56789abcde
#duid-type duid-ll

iface eth0 {
    ia
    option dns-server
}
```

When using link-layer+time or link-layer DUID types, dibbler will autodetect addresses. To generate enterprise number-based DUID, specific data must be provided: enterprise-number (a 32-bit integer, 1234 in the example above) and a enterprise-specific identifier of arbitrary length (56:78:9a:bc:de in the example above).

4.20 Debugging/compatibility features

During interoperability test session, it has been discovered that sometimes various different implementations of the DHCPv6 protocol has problem to interact with each other. As the protocol itself does not specify all aspects and details, some things can be done differently and there is no only one „proper way”. It also happens that some implementations may have problems with different than its authors expected behaviors. To allow better interoperation between such implementation, dibbler has some features, which cause different behaviors. This could result in a successful operation with other servers, clients and relays.

Normal users don't have to worry about those options, unless they are using different servers, clients and relays. Those options also may be useful for other vendors, who want to test their implementations. Therefore those options can be perceived as a debugging or testing features.

4.20.1 Interface-id option

During message relaying (done by relays), options can be placed in the *RELAY-FORW* message in arbitrary order. In general, there are two options used: *interface-id* option and *relay-message* option. The former defines interface identifier, which the original data has been received from, while the later contains the whole original message. When several relays are used, such message-in-option encapsulation can occur multiple times.

It is possible to instruct relay to store *interface-id* before *relay-message* option or after. There is also possibility to instruct server to omit the *interface-id* option altogether, but since this violates [3],

it should not be used. In general, this configuration parameter is only useful when dealing with buggy relays, which can't handle all option orders properly. Consider this parameter a debugging feature.

Similar parameter is defined for the server. Server uses it during *RELAY-REPL* generation.

See description of the *interface-id-order* parameters in Server configuration (section 5) and Relay configuration (section 7).

4.20.2 Non-empty IA_NA option

When client is interested in receiving an address, it sends *IA_NA* option. In this option it may (but don't have to) include addresses (using *IAADDR* suboption) as hints for the server.

It has been detected that some servers does not support properly (perfectly valid) empty *IA_NA* options. To work around this problem, dibbler-client can be instructed to include two *IAADDR* in the *IA_NA* option. Here is minimal example config, which achieves that:

```
iface eth0 {  
  ia {  
    address  
    address  
  }  
}
```

4.20.3 Providing address/prefix hints

Dibbler client can be instructed to send specific addresses or prefixes in its *SOLICIT* messages. This can be achieved by using following syntax:

```
# client.conf - request specific address/prefix  
iface eth0 {  
  ia {  
    address { 2001:db8:dead:beef:: }  
  }  
  pd {  
    prefix 2001:db8:aaaa::/64  
  }  
}
```

By default, client will use those addresses in *SOLICIT* message only. When transmitting *REQUEST* message, it will copy proposals from *ADVERTISE* message, received from a server. To force client to use those specified addresses and/or prefixes also in *REQUEST*, please use *insist-mode* directive.

4.21 Experimental features

This section contains experimental features. Besides serving as a general purpose DHCPv6 solution, dibbler is also used as a research tool for new ideas.⁵ Normal users are recommended NOT to use any of those features. Advanced users should take extra caution. Also be aware that those options may not work as expected, may be incomplete and not documented properly. You have been warned.

Since those mechanisms are non-standard, they are disabled by default. To enable them, „experimental” keyword must be placed in the *client.conf* or *server.conf* files.

⁵This was particularly true during my Ph. D. research.

4.21.1 Address Parameters

Note: This feature is experimental, i.e. it is not described by any RFC or even internet draft. Don't use it, unless you exactly know what you are doing.

There is ongoing process to register and publish internet draft, which describes this operation. Latest versions of this draft will be available at <http://klub.com.pl/dhcpv6/doc/>.

RFC3315 ([3]) defines means of allocating IPv6 addresses to all interested clients. Clients are able to obtain IPv6 addresses and other configuration parameters from the servers. Unfortunately, client after obtaining an address, are not able to communicate each other due to missing prefix information. That property of the DHCPv6 protocol is sometimes perceived as a major disadvantage. To overcome this deficiency, an extension to the protocol has been proposed.

It is possible to attach additional option conveyed in normal IAADDR option. That additional option, called ADDRPARAMS option, contains additional information related to that address. To maintain backward compatibility, server does not send such option by default, even when configured to support it. To make server send this option, client must explicitly ask for it.

Below are example configuration files for server and client. Note that since that is a non-standard feature, user must explicitly allow experimental options before configuring it (thus „experimental” keyword is required).

Example `client.conf` configuration file:

```
#client.conf
log-mode short
log-level 8

iface "eth0" {
    ia {
        addr-params
    }
}
```

Example `server.conf` configuration file:

```
#server.conf
log-level 8

experimental
log-mode short

iface eth0 {

    t1 60
    t2 96
    preferred-lifetime 120
    valid-lifetime 180

    class {
        addr-params 80
        pool 2001:458:ff01:ff03::/80
    }
}
```

4.21.2 Remote Autoconfiguration

Every time a node attaches to a new link, it must renew or obtain new address and parameters, using DHCPv6 protocol (namely *CONFIRM* or *SOLICIT* messages. In case of mobile nodes, it is beneficial to obtain address and other configuration parameters remotely, before actually attaching to destination link. This extension provides experimental support for such operation. Details of this mechanism are thoroughly discussed in [20, 24, 21, 22].

The idea is that once client attaches to its current location, normal configuration procedure is initiated (*SOLICIT*, *ADVERTISE*, *REQUEST* and *REPLY*). However, besides requesting the usual options, client also asks for *NEIGHBORS* option. Server provides that option that contains list of available DHCPv6 servers at neighboring networks.

Once client gains that information, it then initiates remote autoconfiguration process, i.e. it sends *SOLICIT* message to each of the newly discovered neighbors, requesting single IPv6 address. Servers respond remotely, using *REPLY* message. Once this exchange is completed, client knows its new IPv6 address for each of the potential handover targets. What is especially important is that client obtains that knowledge, while still being connected to old location. It may leverage that knowledge, e.g. to update his correspondent nodes in advance.

As Dibbler client is not a mobility software itself, it has to communicate with Mobile IPv6 stack somehow. Therefore it triggers `./remote-autoconf` script every time remote autoconfiguration is concluded.

Note that to support this scenario, both client and all participating servers must have unicast and rapid-commit support enabled.

Following series of `server.conf` files demonstrate, how 3 servers can be configured to inform client about their 2 neighbors.

```
#server.conf for server1.
log-level 8
log-mode short
preference 2

experimental

iface "eth0" {

    t1 1800
    class {
        pool 2001:db8:1111::/64
    }

    rapid-commit 1
    unicast 2001:db8:1111::f

    option neighbors 2001:db8:2222::f,2001:db8:3333::f
}
```

```
#server.conf for server2
log-level 8
log-mode short
preference 1

experimental
```



```
iface "eth1" {
    unicast 2001:db8:2222::f
    rapid-commit 1

    class {
        pool 2001:db8:2222::/64
    }

    option neighbors 2001:db8:1111::f,2001:db8:3333::f
}
```

```
log-level 8
preference 0
experimental

iface "eth1" {

    unicast 2001:db8:3333::f
    rapid-commit 1
    class {
        pool 2001:db8:3333::/64
    }

    option dns-server 2001:db8:3333::f
    option neighbors 2001:db8:1111::f,2001:db8:2222::f
}
```

Client also needs to have enabled number of features. Following config file may serve as an example:

```
log-mode short
log-level 8

experimental
remote-autoconf

iface "eth0" {
    ia
    unicast 1
}
```

4.22 Obsoleted experimental features

This subsection describes experimental features that are not supported anymore. This list is provided for historical reasons. It may be useful for someone to ease tracking of features removal, e.g. to get the latest version that still has support for something.

4.22.1 Mapping prefix

Mapping prefix was an extension that altered client's behavior when delegated prefix is received. Instead of considering it as a prefix that should be distributed on other interfaces, it is used as a map-

ping prefix. Normal prefix processing is suppressed and external script is executed: `mappingprefixadd` or `mappingprefixdel`. That script must be present in the working directory (that would be `/var/lib/dibbler` under Linux or current directory (Windows). This feature was removed in 0.8.0RC1.

4.22.2 Tunnel mode

As support for DS-Lite [\[18\]](#) support was added in 0.8.0RC1, the old support for configuring tunnels was removed.

5 Server configuration

Server configuration is stored in `server.conf` file in the `/etc/dibbler` (Linux systems) or in current (Windows systems) directory.

5.0.3 Global scope

Every option can be declared in a global scope. Global options can be defined here. Also options of a smaller scopes can be defined here – they will be used as a default values. Configuration file has following syntax:

```
global-options
interface-options
class-options
interface-declaration
```

5.0.4 Interface declaration

Each network interface, which should be serviced by the server, must be mentioned in the configuration file. Network interface is defined like this:

```
iface interface-name
{
    interface-options
    class-options
}
```

or

```
iface number
{
    interface-options
    class-options
}
```

where `interface-name` denotes name of the interface and `interface-number` denotes its number. Name no longer needs to be enclosed in single or double quotes (except Windows systems, when interface name contains spaces). Note that virtual interfaces, used to setup relay support are also declared in this way.

5.0.5 Address class scope

Class is a smallest scope used in the server configuration file. It contains definition of the addresses, which will be provided to clients. Only class scoped parameters can be defined here. Address class is declared as follows:

```
class
{
    class-options
    address-pool
}
```

Address pool defines range of the addresses, which can be assigned to the clients. It can be defined in one of the following formats:

```
pool minaddress-maxaddress
pool address/prefix
```

5.0.6 Prefix class scope

That is an equivalent of address class for a prefix delegation. It contains definition of prefixes that are going to be delegation to clients. Only pd-class scoped parameters can be defined here. Prefix class is declared as follows:

```
pd-class
{
    pd-pool prefix/length
    pd-length prefix-length
}
```

5.0.7 Temporary address class scope

That is an equivalent of address class for temporary addresses. It contains definition of temporary addresses that are going to be assigned to clients that request temporary addresses. Only ta-class scoped parameters can be defined here. Prefix class is declared as follows:

```
ta-class {
    pool 2001:db8:1::1-2001:db8:1::ffff
}
```

5.0.8 Routing scope

Support for routing configuration was added in 0.8.0RC1. It is possible to define routing scope. Each scope represents a single router available on-link. In this scope, routes available via specified link may be defined.

```
next-hop address-of-a-router
{
    route1-parameters
    route2-parameters
    ...
}
```

5.0.9 Server options

So called standard options are defined by the base DHCPv6 specification, a so called RFC 3315 document [3]. Those options are called standard, because all DHCPv6 implementations, should properly handle them. Each option has a specific scope it belongs to.

Standard options are declared in the following way:

```
OptionName option-value
```

work-dir – (scope: global). Takes one parameter of string type. Defines working directory.

- log-level** – (scope: global). Takes one integer parameter. Defines verbose level of the log messages. The valid range is from 1 (very quiet) to 8 (very verbose). Those values are modelled after levels used in syslog. These are: 1(Emergency), 2(Alert), 3(Critical), 4(Error), 5 (Warning), 6(Notice), 7(Info) and 8(Debug). Currently Dibbler is using levels 3 to 8, as 1 and 2 are reserved for system wide emergency events.
- log-name** – (scope: global). Takes one string parameter. Defines than name, which will be used during logging.
- log-mode** – (scope: global). Takes one parameter that can be short, full, precise or syslog. Defines logging mode. In the default, full mode, name, date and time in the h:m:s format will be printed. In short mode, only minutes and seconds will be printed (this mode is useful on terminals with limited width). Precise mode logs information with seconds and microsecond precision. It is a useful as a performance diagnostic tool for finding bottlenecks in the DHCPv6 autoconfiguration process. Syslog works under POSIX systems (Linux, Mac OS X, BSD family) and allows default POSIX logging functions.
- log-colors** – (scope: global). Takes one boolean parameter. Defines if logs printed to console should use colors. That feature is used to enhance logs readability. As it makes the log files messy on systems that do not support colors, it is disabled by default. The default is off.
- cache-size** – (scope: global). Takes one parameter that specifies cache size in bytes. The default value is 1048576 (1MB). It defines a size of the memory (specified in bytes) which can se used to store cached entries.
- stateless** – (scope: global). It may be present or missing. The default is missing. Defines that server should run in stateless mode. In this mode only configuration parameters are defined, not addresses or prefixes. It is mutually exclusive with *class*, *ta-class* and *pd-class*. See Section 4.11.
- interface-id-order** – (scope: global). Take one parameter that can be one of **before**, **after** or **omit**. The default is **before**. This parameter defines placement of the interface-id option. During message relaying options can be placed in the *RELAY-REPL* message is arbitrary order. This option has been specified to control that order. *interface-id* option can be placed before or after *relay-message* option. There is also possibility to instruct server to omit the *interface-id* option altogether, but since this violates [3], it should not be used. In general, this configuration parameter is only useful when dealing with buggy relays, which can't handle all option orders properly. Consider this parameter a debugging feature. Note: similar parameter is available in the dibbler-relay.
- experimental** – (scope: global). Allows enabling experimental features. There are some highly-experimental features present in Dibbler. To make a clear statement about their experimental nature, user is required to acknowledge that fact by putting this statement in its config file. This statement may be present or absent. The default is absent.
- inactive-mode** – (scope: global, type: present or missing, default: missing). This enables so called inactive mode. When server begins operation and it detects that required interfaces are not ready, error message is printed and server exits. However, if inactive mode is enabled, server sleeps instead and wait for required interfaces to become operational. That is a useful feature, when using wireless interfaces, which take some time to initialize as associate.
- accept-leasequery** – (scope: interface). Takes one boolean parameter that specifies if server should support leasequery [16] protocol on a given interface. The default value is 0 (leasequery is not supported by default). See Section 4.10.

- guess-mode** – (scope: global, type: present or missing, default: missing). When this option is enabled, server will not pay close attention to the interface-id option in relayed messages. If interface-id has a value other than specified in server.conf or even when there is no interface-id option at all, it will use first relay defined.
- script** – (scope: global). Takes one string parameter that specifies name of a script that will be called every time something important happens in a system, e.g. when address or prefix is assigned, updated or released. See Section 4.7.
- fqdn-ddns-address** – (scope: global). Takes one parameter that specifies address of DNS server that will be used for DNS Updates. See Section 4.5.
- ddns-protocol** – (scope: global). Takes one string parameter. Defines protocol that should be used during DNS Update mechanism. Allowed values are **tcp**, **udp** and **any**. **Any** means that UDP will be tried first and if it fails, update will be retried over TCP. See Section 4.5.
- ddns-timeout** – (scope: global). Takes one integer parameter that specifies timeout in milliseconds. Defines how long client should wait for DNS server response during DNS Update before declaring update a failure. See Section 4.5.
- class** – (scope: interface). This definition must be followed by curly braces and creates a new address class scope. See Section 5.0.5.
- pd-class** – (scope: interface). This definition must be followed by curly braces and creates a new prefix-delegation class scope. See Section 5.0.6.
- ta-class** – (scope: interface). This definition must be followed by curly braces and creates a new temporary address class scope. See Section 5.0.7.
- next-hop** – (scope: interface). This definition takes one parameter that defines IPv6 address of a router. Without any further parameters, it conveys an information about default route for bandwidth limited networks. That mode is discouraged, unless there are significant bandwidth limitations. It is usually followed by curly braces that create a new route scope. See Section 5.0.8.
- preference** – (scope: interface, type: 0-255, default: none). Each server can be configured to a specific preference level. When client receives several *ADVERTISE* messages, it should choose that server, which has the highest preference level. It is also worth noting that client, upon reception of the *ADVERTISE* message with preference set to 255 should skip wait phase for possible other *ADVERTISE* messages.
- unicast** – (scope: interface, type: address, default:none). Normally clients sends data to a well known multicast address. This is easy to achieve, but it wastes network resources as all nodes in the network must process such messages and also network load is increased. To prevent this, server might be configured to inform clients about its unicast address, so clients, which accept it, will switch to a unicast communication.
- rapid-commit** – (scope: interface, type: boolean, default: 0). This option allows rapid commit procedure to be performed. Note that enabling rapid commit on the server side is not enough. Client must be configured to allow rapid commit, too.
- iface-max-lease** – (scope: interface, type: integer, default: $2^{32} - 1$). This parameter defines, how many normal addresses can be granted on this interface.

client-max-lease – (scope: interface, type: interger, default: $2^{32} - 1$). This parameter defines, how many addresses one client can get. Main purpose of this parameter is to limit number of used addresses by misbehaving (malicious or restarting) clients.

relay – (scope: interface). Takes one string or integer parameter that designated interface name or interface index. It is used in relay definition. It specifies name of the physical (or name of another relay, if cascade relaying is used) interface, which is used to receive and transmit relayed data. See 4.2 for details of relay deployment and sections 5.1.8 and 5.1.9 for configuration examples.

interface-id – (scope: interface, type: integer, default: not defined). Used in relay definition. Each relay interface should have defined its unique identified. It will be sent in the *interface-id* option. Note that this value must be the same as configured in the dibbler-relay. It may be possible to specify this parameter by using a number (option will be 4 bytes long), a string or a hex of arbitrary length (please use the same format as for DUID). See 4.2, 5.1.8 and 7.4 for details.

vendor-spec – (scope: interface, type: integer-hexstring, default: not defined). This parameter can be used to configure some vendor-specific information option. Since there are no dibbler-specific options, this implementation is flexible. User can specify in the configuration file, how should this option look like. See 5.1.11 section for details. It is uncommon, but possible to define several vendor specific options for different vendors. In such case, administrator must specify coma separated list. Each list entry is a vendor (enterprise number), „-“ sign and a hex dump (similar to DUID).

pool – (scope: class). Takes coma separated IPv6 address ranges. Each range is defined as first-address, a dash and a second address. Defines a range of available addresses that will be assigned in specific class. An example pool definition looks like this:

```
pool 2001:db8:abcd:: - 2001:db8:abcd::ffff
```

pd-pool – (scope: pd-class). Takes coma separated IPv6 address ranges. Each range is defined as fist-address, a dash and a second address. Defines a range of available prefixes (only prefixes themselves, not their lengths) that will be assigned in specific class. An example pd-pool definition looks like this:

```
pd-pool 2001:db8:abcd:: - 2001:db8:abcd::ffff
```

share – (scope: class). Defines percentage of clients that a class should handle. This parameter is only useful if there are more then one class defined. See Section 5.1.7.

T1 – (scope: class, type: integer or integer range: default: $2^{32} - 1$). This value defines after what time client should start renew process. Exact value or accepted range can be specified. When exact value is defined, client's hints are ignored completely.

T2 – (scope: class, type: integer or integer range, default: $2^{32} - 1$). This value defines after what time client will start emergency rebind procedure if renew process fails. Exact value or accepted range can be specified. When exact value is defined, client's hints are ignored completely.

valid-lifetime (scope: class, type: integer or integer range, default: $2^{32} - 1$). This parameter defines valid lifetime of the granted addresses. If range is specified, client's hints from that range are accepted.

preferred-lifetime (scope: class, type: integer or integer range, default: $2^{32} - 1$). This parameter defines preferred lifetime of the granted addresses. If range is specified, client's hits from that range will be accepted.

- class-max-lease** – (scope: interface, type: interger, default: $2^{32} - 1$). This parameter defines, how many addresses can be assigned from that class.
- reject-clients** – (scope: class, type: address or DUID list, default: none). This parameter is sometimes called black-list. It is a list of a clients, which should not be supported. Clients can be identified by theirs link-local addresses or DUIDs.
- accept-only** – (scope: class, type: address or DUID list, default: none). This parameter is sometimes called white-list. It is a list of supported clients. When this list is not defined, by default all clients (except mentioned in reject-clients) are supported. When accept-only list is defined, only client from that list will be supported.
- addr-params** – (scope: class). Experimental feature that takes one boolean parameter. It defines prefix length that is configured in addr-params option. See Section 4.21.1.
- allow** – (scope: class). Specifies that clients that belong to a specific client class are allowed to use that address class. Takes one string parameter that defines client class name. See Section 4.6.
- deny** – (scope: class). Specifies that clients that belong to a specific client class are denied use of that address class. Takes one string parameter that defines client class name. See Section 4.6.
- option dns-server** – (scope: interface, type: address list, default: none). This option conveys information about DNS servers available. After retriving this information, clients will be able to resolve domain names into IP (both IPv4 and IPv6) addresses. Defined in [5].
- option domain** – (scope: interface, type: domain list, default: none). This option is used for configuring one or more domain names, which clients are connected in. For example, if client's hostname is `alice.mylab.example.com` and it wants to contact `bob.mylab.example.com`, it can simply refer to it as `bob`. Without domain name configured, it would have to use full domain name. Defined in [5].
- option ntp-server** – (scope: interface, type: address list, default: none). This option defines information about available NTP servers. Network Time Protocol [1] is a protocol used for time synchronisation, so all hosts in the network has the same proper time set. Defined in [12].
- option time-zone** – (scope: interface, type: timezone, default: none). It is possible to configure time-zone, which is provided by the server. Note that this option is considered obsolete as it is mentioned in draft version only [25]. Work on this draft seems to be abandoned as similar functionality is provided by now standard [12].
- option sip-server** – (scope: interface, type: address list, default: none). Session Initiation Protocol [2] is an control protocol for creating, modifying, and terminating sessions with one or more participants. These sessions include Internet telephone calls, multimedia distribution, and multimedia conferences. Its most common usage is VoIP. Format of this option is defined in [4].
- option sip-domain** – (scope: interface, type: domain list, default: none). It is possible to define domain names for Session Initiation Protocol [2]. Configuration of this parameter will ease usage of domain names in the SIP protocol. Format of this option is defined in [4].
- option nis-server** – (scope: interface, type: address list, default: none). Network Information Service (NIS) is a Unix-based system designed to use common login and user information on multiple systems, e.g. universities, where students can log on to ther accounts from any host. Its format is defined in [9].

option nis-domain – (scope: interface, type: domain list, default: none). Network Information Service (NIS) can also specify domain names. It can be configured with this option. It is defined in [9].

option nis+-server – (scope: interface, type: address list, default: none). Network Information Service Plus (NIS+) is an improved version of the NIS protocol. This option is defined in [9].

option nis+-domain – (scope: interface, type: domain list, default: none). Similar to nis-domain, it defines domains for NIS+. This option is defined in [9].

option lifetime – (scope: interface, type: boolean, default: no). Base spec of the DHCPv6 protocol does offer way of refreshing addresses only, but not the options. Lifetime defines, how often client should renew all its options. When defined, lifetime option will be appended to all replies, which server sends to a client. If client does not support it, it should ignore this option. Format of this option is defined in [11].

option fqdn – (scope: interface). Takes 0, 1 or 2 integer parameters that are followed by FQDN list. Additional integer parameters designate fqdn-mode and reverse zone length in DNS Update. FQDN-mode can have 3 values: 2 (both AAAA and PTR record will be updated by server), 1 (server will update PTR only) or 0 (server will not update anything). Reverse zone length is an integer between 0 and 128 and designates reverse zone length. FQDN list is a comma separated list of fully qualified domain names, with possible reservations for DUIDs or addresses. FQDN mechanism is defined in [13]. See Section 4.5.

accept-unknown-fqdn – (scope: Interface). Takes one integer parameter, possibly followed by second string parameter that designated domain name. It specifies how server should react to incoming FQDN options that contain names that are unknown to the server. Allowed values are 0 (reject), 1 (send other name from allowed list), 2 (accept any name client sends), 3 (accept any name client sends, but append specified domain suffix) and 4 (ignore client's hint, generate name based on his address, append domain name). Choices 3 and 4 require additional string parameter that defines domain suffix. See Sections 4.5 and .

option – (scope: interface). Takes one integer number followed by several possible parameter combinations. It defines custom option that server may send out to clients. Supported formats are:

```
option number - DUID
option number address-keyword address
option number address-list
option number string-keyword string
```

Where number is an integer that defined option type, DUID is a hex-formatted string that defines option content, address-keyword is a word “address”, address is an IPv6 address, address-list is comma separated list of addresses, string-keyword is a word “string” and string is any string enclosed in single or double quotes. See Section 4.4 and 5.1.20.

option aftr – (scope: interface, type: FQDN). In Dual-Stack Lite networks, client may want to configure DS-Lite tunnel. Client may want to obtain information about AFTR (a remote tunnel endpoint). This option conveys a fully qualified domain name of the remote tunnel. This option is defined in [18].

option neighbors – (scope: interface). Experimental feature for Remote Autoconfiguration. Do not use it unless you know exactly what you are doing. Takes comma separated list of addresses. This option requires *experimental* mode to be enabled. See Section 4.21.2.

auth-method – (scope: global, type: string, default: empty). Set it to one of the following values to enable authentication on the server side, using selected method of generating authentication information: `none`, `digest_plain`, `digest_hmac_md5`, `digest_hmac_sha1`, `digest_hmac_sha224`, `digest_hmac_sha256`, `digest_hmac_sha384`, and `digest_hmac_sha512`.

auth-lifetime – (scope: global, type: integer, default: 0). Authentication lifetime. Currently not supported.

auth-key-len – (scope: global, type: integer, default: 32). Key generation nonce length (see [19] for details).

client-class – (scope: global). Takes one string parameter that defines name of a client class. Client class name is followed by curly brackets that create client-class scope. Clients can be grouped into classes depending on rules defined in client-class. This can be used together with **allow** and **deny** to assign segregate clients into different groups. See Section 4.6 for overview and Section 5.0.10 for list of supported expressions.

5.0.10 Client class quantifiers

Additional parameters are used during client class definition. See Section 4.6 for details and examples.

match-if – (scope: client-class).

contain – (scope: client-class).

substring – (scope: client-class).

== – (scope: client-class).

and – (scope: client-class).

or – (scope: client-class).

client.vendor-spec.en – (scope: client-class).

client.vendor-spec.data – (scope: client-class).

client.vendor-class.en – (scope: client-class).

client.vendor-class.data – (scope: client-class).

5.1 Server configuration examples

This subsection contains various examples of the server configuration. If you are interested in additional examples, download source version and look at `*.conf` files.

5.1.1 Example 1: Simple

In opposite to client, server uses only interfaces described in config file. Let's examine this common situation: server has interface named `eth0` (which is fourth interface in the system) and is supposed to assign addresses from `2000::100/124` class. Simplest config file looks like that:

```
# server.conf
iface eth0
{
    class
```

```
{
  pool 2000::100-2000::10f
}
```

5.1.2 Example 2: Timeouts

Server should be configured to deliver specific timer values to the clients. This example shows how to instruct client to renew (T1 timer) addresses one in 10 minutes. In case of problems, ask other servers in 15 minutes (T2 timer), that allow preferred lifetime range is from 30 minutes to 2 hours, and valid lifetime is from 1 hour to 1 day. DNS server parameter is also provided. Lifetime option is used to make clients renew all non-address related options renew once in 2 hours.

```
# server.conf
iface eth0
{
  T1 600
  T2 900
  preferred-lifetime 1800-3600
  valid-lifetime 3600-86400
  class
  {
    pool 2000::100/80
  }

  option dns-server 2000::1234
  option lifetime 7200
}
```

5.1.3 Example 3: Limiting amount of addresses

Another example: Server should support 2000::0/120 class on eth0 interface. It should not allow any client to obtain more than 5 addresses and should not grant more than 50 addresses in total. From this specific class only 20 addresses can be assigned. Server preference should be set to 7. This means that this server is more important than all server with preference set to 6 or less. Config file is presented below:

```
# server.conf
iface eth0
{
  iface-max-lease 50
  client-max-lease 5
  preference 7
  class
  {
    class-max-lease 20
    pool 2000::1-2000::100
  }
}
```

5.1.4 Example 4: Unicast communication

Here's modified previous example. Instead of specified limits, unicast communication should be supported and server should listen on 2000::1234 address. Note that default multicast address is still supported. You must have this unicast address already configured on server's interface.

```
# server.conf
log-level 7
iface eth0
{
    unicast 2000::1234
    class
    {
        pool 2000::1-2000::100
    }
}
```

5.1.5 Example 5: Rapid-commit

This configuration can be called quick. Rapid-commit is a way to shorten exchange to only two messages. It is quite useful in networks with heavy load. In case if client does not support rapid-commit, another trick is used. Preference is set to maximum possible value. 255 has a special meaning: it makes client to skip wait phase for possible advertise messages from other servers and quickly request addresses.

```
# server.conf
log-level 7
iface eth0
{
    rapid-commit yes
    preference 255
    class
    {
        pool 2000::1/112
    }
}
```

5.1.6 Example 6: Access control

Administrators can selectively allow certain client to use this server (white-list). On the other hand, some clients could be explicitly forbidden to use this server (black-list). Specific DUIDs, DUID ranges, link-local addresses or the whole address ranges are supported. Here is config file:

```
# server.conf
iface eth0
{
    class
    {
        # duid of the rejected client
        reject-clients '00001231200adeaaa'
        2000::2f-2000::20 // it's in reverse order, but it works.
                        // just a trick.
    }
}
```

```
}  
}  
iface eth1  
{  
    class  
    {  
        accept-only fe80::200:39ff:fe4b:1abc  
        pool 2000::fe00-2000::feff  
    }  
}
```

5.1.7 Example 7: Multiple classes

Although this is not common, a few users have requested support for multiple classes on one interface. Dibbler server can be configured to use several classes. When client asks for an address, one of the classes is being chosen on a random basis. If not specified otherwise, all classes have equal probability of being chosen. However, this behavior can be modified using **share** parameter. In the following example, server supports 3 classes with different preference level: class 1 has 100, class 2 has 200 and class 3 has 300. This means that class 1 gets $\frac{100}{100+200+300} \approx 16\%$ of all requests, class 2 gets $\frac{200}{100+200+300} \approx 33\%$ and class 3 gets the rest ($\frac{300}{100+200+300} = 50\%$).

```
# server.conf  
log-level 7  
log-mode short  
  
iface eth0 {  
    T1 1000  
    T2 2000  
  
    class {  
        share 100  
        pool 4000::1/80  
    }  
    class {  
        share 200  
        pool 2000::1-2000::ff  
    }  
  
    class {  
        share 300  
        pool 3000::1234:5678/112  
    }  
}
```

5.1.8 Example 8: Relay support

To get more informations about relay configuration, see section [4.2](#). Following server configuration example explains how to use relays. There is some remote relay with will send encapsulated data over eth1 interface. It is configured to append interface-id option set to 5020 value. Let's allow all clients using

this relay some addresses and information about DNS servers. Also see section 7.4.1 for corresponding relay configuration.

Note that although eth1 interface is mentioned in the configuration file, direct traffic from clients located on the eth1 interface will not be supported. In this example, eth1 is used only to support requests relayed from remote link identified with interface-id value 5020. Of course it is possible to support both local and remote traffic. In such case, normal eth1 definition should be present in the server configuration file. Also note that real (physical) interfaces should be specified before logical ones.

```
# server.conf
iface relay1 {
    relay eth1
    // interface-id 5020
    // interface-id "some interface name"
    interface-id 0x427531264361332f3000001018680f980000

    class {
        pool 2000::1-2000::ff
    }
    option dns-server 2000::100,2000::101
}
```

5.1.9 Example 9: Cascade 2 relays

This is an advanced configuration. It assumes that client sends data to relay1, which encapsulates it and forwards it to relay2, which eventually sends it to the server (after additional encapsulation). It assumes that first relay adds interface-id option set to 6011 and second one adds similar option set to 6021. For details about relays in general and cascade setup in particular, see section 4.2. Also see section 7.4.4 for corresponding relays configuration.

```
# server.conf
iface relay1
{
    relay eth0
    interface-id 6011
}

iface relay2
{
    relay relay1
    interface-id 6021
    T1 1000
    T2 2000
    class {
        pool 6020::20-6020::ff
    }
}
```

5.1.10 Example 10: Dynamic DNS (FQDN)

Support for Dynamic DNS Updates was added in version 0.5.0RC1. To configure it on the server side, list of available names usually should be defined. Each name can be reserved for a certain address

or DUID. When no reservation is specified, it will be available to everyone, i.e. the first client asking for FQDN will get this name. In following example, name 'zebuline.example.com' is reserved for address 2001::db8:1::1, kael.example.com is reserved for 2001:db8:1::2 and test.example.com is reserved for client using DUID 00:01:00:00:43:ce:25:b4:00:13:d4:02:4b:f5.

Also note that it is required to define, which side can perform updates. This is done using single number after „option fqdn” phrase. Server can perform two kinds of DNS Updates: AAAA (forward resolving, i.e. name to address) and PTR (reverse resolving, i.e. address to name). To configure server to execute both updates, specify 2. This is a default behavior. If this value will be skipped, server will attempt to perform both updates. When 1 will be specified, server will update PTR record only and will leave updating AAAA record to the client. When this value is set to 0, server will not perform any updates.

The last parameter (64 in the following example) is a prefix length of the reverse domain supported by the DNS server, i.e. if this is set to 64, and 2000::/64 addresses are used, DNS server must support 0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.0.2.ip6.arpa. zone.

There are several additional parameters that affect DNS Update mechanism. **ddns-protocol** specifies protocol that should be used for communication with DNS server. Allowed values are **udp**, **tcp** or **any**. “Any” will try to use UDP and if that fails, it will revert to TCP. Second parameter is **ddns-timeout** that specifies maximum time allowed for DNS server to respond before assuming communication failure. It is specified in milliseconds.

The next useful parameter is **fqdn-ddns-address** that specifies address of DNS server that updates should be performed to. If it is not specified, first DNS address from **option dns-server** will be used.

The last important parameter is **+accept-unknown-fqdn**. In a simplest scenario, server is configured with a list of allowed names. Connecting clients may get only those names. That is convenient case, but it is often not feasible to deploy it in a real network. In real networks, clients usually send out their own names, rather than wait for server to assign them one. In such cases, it is somewhat expected that server will not have complete list of all possible names that clients may send. Thus sooner or later server will likely receive a fqdn name that is unknown to him. This parameter specifies server behavior in such case.

There are 5 possible policies currently supported. Each one is identified with an integer between 0 and 4. 0 means that unknown names should be rejected. That policy is useful for strictly controlled networks. 1 means that other available name from list of possible names should be sent instead. This is a compromise between strict control over names and liberal acceptance of clients' names. Policy 2 accepts any name that client will send. Names will be sanity checked. Note that mobile and nomadic clients may send names from their home networks. That may be a problem if server attempts to update AAAA records as its DNS server will probably only accept AAAA updates for locally administered domains. As a solution to this problem, policy 3 was implemented. It takes client's hostname (without its domain name), appends local domain name and uses such constructed fully qualified domain name. For example, if client sends **nomad.faraway.org** while visiting **example.org**, with this policy in place, **nomad.example.org** will be assigned.

The last policy is useful for larger networks. Instead of accepting clients' ideas about their hostnames, dedicated name is generated based on assigned address. For example, client that received 2001:db8:1:0:c7a8:e81:c500:46ce address in domain **example.org** will be assigned a 2001-db8-1-0-c7a8-e81-c500-46ce name.

Following config file is a good starting point for tweaking DNS Update enabled server configuration.

```
# server.conf

# Logging level range: 1(Emergency)-8(Debug)
#
log-level 8

# Don't log full date
```

```
log-mode short

# Set protocol to one of the following values: udp, tcp, any
ddns-protocol udp

# Sets DDNS Update timeout (in ms)
ddns-timeout 1000

# specify address of DNS server to be used for DDNS
fqdn-ddns-address 2001::1

iface "eth0" {

# assign addresses from this class
  class {
    pool 2001:db8:1::/64
  }

# provide DNS server location to the clients
# also server will use this address to perform DNS Update,
# so it must be valid and DNS server must accept DNS Updates.
  option dns-server 2000::1

# provide their domain name
  option domain example.com

# provide fully qualified domain names for clients
# note that first, second and third entry is reserved
# for a specific address or a DUID
  option fqdn 1 64
    zebuline.example.com - 2000::1,
    kael.example.com - 2000::2,
    wash.example.com - 0x0001000043ce25b40013d4024bf5,
    zoe.example.com,
    malcolm.example.com,
    kaylee.example.com,
    jayne.example.com,
    inara.example.com

# specify what to do with client's names that are not on the list
# 0 - reject
# 1 - send other name from allowed list
# 2 - accept any name client sends
# 3 - accept any name client sends, but append specified domain suffix
# 4 - ignore client's hint, generate name based on his address, append domain name

  accept-unknown-fqdn 4 example.org

}
```


5.1.11 Example 11: Vendor-specific Information option

It is possible to configure dibbler-server to provide vendor-specific information options. Since there are no dibbler-specific parameters, this implementation is quite flexible. Enterprise number as well as content of the option itself can be configured.

```
# server.conf
log-level 8
log-mode precise
iface "eth1" {
    class {
        pool 2000::1-2000::ff
    }

    option vendor-spec 1234-0x00002fedc
}
```

In some rare cases, several different options for different vendors may be specified. In the following example 2 different values are defined, depending on which vendor client will specify in *SOLICIT* or *REQUEST* message. If client will only mention that it is interested in any vendor specific info (i.e. did not send *vendor-spec info* option, but only mentioned in *option request* option, it will receive first vendor option defined (in the following example, that would be a 1234 and 0002fedc).

```
# server.conf
log-level 8
log-mode precise
iface "eth1" {
    class {
        pool 2000::1-2000::ff
    }

    option vendor-spec 1234-0x00002fedc,5678-0x0002aaaa
}
```

5.1.12 Example 12: Per client configuration

Usually all clients receive the same configuration options, e.g. all clients will use the same DNS server. However, it is possible to specify that particular clients should receive different options than others. Following example set DNS server to 2000::1, domain to example.com and vendor specific information for vendor 5678. However, if requesting client has DUID 00:01:02:03:04:05:06:07:08, it will receive different parameters (second.client.biz domain, 1234::5678:abcd as a DNS server and finally different vendor-specific information). Also client with DUID 0x0001000044e8ef3400085404a324 will receive normal domain and DNS server, but different (vendor=2) vendor specific information. See section 4.15 for background information. Since 0.8.0RC1, also addresses can be reserved in this way.

```
# server.conf
iface "eth0" {

    class {
        pool 2000::1/64
    }
}
```

```
# common configuration options, provided for all clients
option dns-server 2000::1
option domain example.com
option vendor-spec 5678-0x0002aaaa

# special parameters for client with DUID 00:01:02:03:04:06
client duid 0x000102030406
{
    address 2001::123
    option domain second.client.biz
    option dns-server 1234::5678:abcd
    option vendor-spec 2-0x000122, 22-0x222222
}

# special address reserved for client with this remote-id option
# (remote-id option may be added by relays)
client remote-id 5-0x01020304
{
    address 2000::0102:0304
    option domain our.special.remoteid.client.org
}

# client link-local fe80::211:25ff:fe12:6688
# (link-local reservation is not supported yet. configure clients
# to use DUID-LL (link-local address based DUID) and then make
# DUID based reservations)
# {
#     option domain link.local.detected.interop.test.com
# }

}
```

5.1.13 Example 13: Prefix delegation

Prefix delegation works quite similar to normal address granting. Administrator defines pool and server provides prefixes from that pool. Before using prefix delegation, please read section 4.1. Client configuration example is described in section 6.8.11.

```
# server.conf
log-mode precise

iface "eth0" {

# the following lines instruct server to grant each client
# prefix for this pool. For example, client might get
# 2222:2222:2222:2222:2222:993f::/96
pd-class {
    pd-pool 2222:2222:2222:2222:2222::/80
    pd-length 96
    T1 11111
}
```

```
        T2 22222
    }
}
```

5.1.14 Example 14: Multiple prefixes

It is possible to define more than one pool, so each client will receive several prefixes. It is necessary to define each pool with the same length, i.e. it is not possible to mix different pool lengths. See section 4.1 for prefix delegation background information. Client configuration example is described in section 6.8.11.

```
# server.conf
log-mode precise

iface "eth0" {

    T1 1800
    T2 2700
    preferred-lifetime 3600
    valid-lifetime 7200

    # provide addresses from this pool
    class {
        pool 5000::/48
    }

    # the following lines instruct server to grant each client
    # 2 prefixes. For example, client might get
    # 2222:2222:2222:2222:2222:993f:6485::/96 and
    # 1111:1111:1111:1111:1111:993f:6485::/96
    pd-class {
        pd-pool 2222:2222:2222:2222:2222::/80
        pd-pool 1111:1111:1111:1111:1111::/80
        pd-length 96
        T1 11111
        T2 22222
    }
}
```

5.1.15 Example 15: Inactive mode

See sections 6.8.13 and 4.17 for inactive mode explanation. The same behavior has been added for server.

```
#server.conf

log-level 8

inactive-mode
```

```
iface "eth0" {  
  
    class {  
        pool 2000::/64  
    }  
}
```

5.1.16 Example 16: Leasequery

A separate entity called requestor can send queries regarding assigned addresses and prefixes. Server can be configured to support such lease queries. See section [4.10](#) for detailed explanation.

```
#server.conf  
  
log-level 8  
  
iface "eth0" {  
    accept-leasequery  
  
    class {  
        pool 2000::/64  
    }  
}
```

5.1.17 Example 17: Authentication

It is possible to configure server to require authentication. In this example, HMAC-SHA-512 will be used as an authentication method. Key Generation Nonce will have 64 bytes.

```
# server.conf  
  
auth-method digest-hmac-sha512  
auth-key-len 64  
  
iface eth0  
{  
    class  
    {  
        pool 2000::100-2000::10f  
    }  
}
```

5.1.18 Example 18: Relay support with unknown interface-id

To get more informations about relay configuration, see section [4.2](#). In pervious examples ([5.1.8](#), [5.1.9](#)) it was assumed that interface-id set by relay is known. However, in some cases that is not true. If sysadmin wants to accept relayed messages from any relay, there is a feature called guess mode. It tries to match any relay defined in server.conf instead of exactly checking interface-id value.

Since there is only one relay defined, it will be used, regardless of the interface-id value (or even lack of thereof).

```
# server.conf
guess-mode

iface relay1 {
    relay eth1
    interface-id 5020
    class {
        pool 2000::1-2000::ff
    }
    option dns-server 2000::100,2000::101
}
```

5.1.19 Example 19: DS-Lite tunnel (AFTR)

Server is able to provide Dual-Stack lite configuration for clients. Both address and name based configurations are supported:

```
iface "eth0" {
    class {
        pool 2001:db8::/64
    }

    option ds-lite 2001:db8:1::ffff
    option ds-lite sc.example.org
}
```

5.1.20 Example 20: Custom options

Server may be configured to also provide custom options to the clients. See Section 4.4 for details.

```
iface "eth0" {
    class {
        pool 2001:db8::/64
    }

    option 145 duid 01:02:a3:b4:c5:dd:ea
    option 146 address 2001:db8:1::dead:beef
    option 147 address-list 2001:db8:1::aaaa,2001:db8:1::bbbb
    option 148 string "secretlair.example.org"
}
```

5.1.21 Example 21: Remote Autoconfiguration

Server does support experimental extension called remote autoconfiguration, as defined in [24]. See Section 4.21.2 for details and configuration examples.

6 Client configuration

This section describes Dibbler server, relay and client configuration. Square brackets denotes optional values: mandatory [optional]. Alternative is marked as |. A | B means A or B. Parsers are case-insensitive, so `Iface`, `IfAcE`, `iface` and `IFACE` mean the same. This does not apply to interface names. `eth0` and `ETH0` are two different interfaces.

6.1 Data types

Config file parsing is token-based. Token can be considered a keyword or a specific phrase. Here are more commonly used types:

IPv6 address – IPv6 address, e.g. `2000:db8:1::dead:beef`

32-bit decimal integer – string containing only numbers, e.g. `12345`

string – string of arbitrary characters enclosed in single or double quotes, e.g. `'this is a string'`. If string contains only a-z, A-Z and 0-9 characters, quotes can be omitted, e.g. `beeblebrox`

DUID identifier – hex number starting with `0x`, e.g. `0x12abcd`. In Dibbler version 0.8.0RC1, another format was introduced: 2 hex digits separated by comma, e.g. `12:aa:bb:cc:d5`. As this format may in some cases be confused with IPv6 address, the old format (starting with `0x`) remains to be supported.

IPv6 address list – IPv6 addresses separated with commas, e.g. `2001:db8:1::face:b00c, fe80::abcd:1234,::1`

DUID list – DUIDs separated with commas, e.g. `0x0123456,0x0789abcd`

string list – strings separated with commas, e.g. `tealc,jackson,carter,oneill`

boolean – YES, NO, TRUE, FALSE, 0 or 1. Each of them can be used, when user is expected to enable or disable specific option.

6.2 Scopes

There are four scopes, in which options can be specified: global, interface, IA and address. Every option is specific for one scope. Each option is only applied to a scope and all subscopes in which it is defined. For example, `T1` is defined for IA scope. If there are several interfaces and each has several address classes, repeating the same `T1` value many times may be a bit awkward. Therefore parameters can be also used in more common scopes. In this case – in interface or global. Defining `T1` in interface scope means: „for this interface the default `T1` value is ...”. The same applies to global scope. Options can be used multiple times. In that case value defined later is used.

Global scope is the largest. It covers the whole config file and applies to all interfaces, IAs, and addresses, unless some lower scope options override it. Next scope is interface. Options defined there are interface-specific and apply to a given interface, all IAs in this interface and addresses in those IAs. Next is IA scope. Options defined there are IA-specific and apply to this IA and to addresses it contains. The narrowest scope is address or prefix.

6.2.1 Interface declaration

Each system interface, which should be configured, must be mentioned in the configuration file. Interfaces can be declared with this syntax:

```
iface interface-name
{
    interface-options
    IA-options
    address-options
}
```

or

```
iface interface-number
{
    interface-options
    IA-options
    address-options
}
```

In the latter case, interface-number denotes interface index (or ifindex). It can be obtained from `ip~1` (Linux), `ip~6~if` (Windows) or sometime `ifconfig` on other systems. `interface-name` is an interface name. Name of the interface does not have to be enclosed in single or double quotes. It is necessary only in Windows systems, where interface names sometimes contain spaces, e.g. "local network connection". Interface scoped options can be used here. IA-scoped as well as address scoped options can also be used. They will be treated as a default values for future definitions of the IA and address instantiations.

6.2.2 IA declaration

IA is an acronym for Identity Association. It is a logical entity representing address or addresses used to perform some functions. It is not suitable for prefixes (see Section 6.2.4). IA-options can be defined, e.g. T1. IPv6 addresses can be defined here. All those values will be used as hints for a server. Almost always, each DHCPv6 client will have exactly one IA on each interface. IA is declared using following syntax:

```
ia [iaid]
{
    IA-options
    address-options
    address-declaration
}
```

IAID is an optional number, which describes identifier of given IA. If not specified, it will be automatically assigned integer numbers starting with 1. There may be more than one IA defined on an interface. IA and PD (see Section 6.2.4) may be used together.

6.2.3 TA declaration

TA (Temporary Address) is a mechanism very similar to IA that allows configuration of temporary addresses. See Section 6.2.2.

6.2.4 PD declaration

PD (Prefix Delegation) is a mechanism that allows leasing prefixes in similar way as addresses. For details, see [6]. PD in client config file causes client to send IA_PD option. This option informs server that client is requesting prefix delegation.

```
pd [iaid]
{
    pd-options
    prefix-declaration
}
```

IAID is an optional number, which identifies this particular PD. If not specified, it will be automatically assigned integer numbers starting with 1. There may be more than one PD defined on an interface. IA (see Section 6.2.2) may be used together.

6.2.5 Address declaration

When IA is defined, it is sometimes useful to define its address. Its value will be used as a hint for the server. Address is declared in the following way:

```
address [number]
{
    address-options
    address-declaration
}
```

where number is optional and denotes how many addresses with those values should be requested. If it is different than 1, then IPv6 address options are not allowed. Only address scoped options can be used here. Address can be defined only within IA scope.

6.2.6 Prefix declaration

When PD is defined, it is sometimes useful to define its prefix. Its value will be used as a hint for the server. Prefix is declared in the following way:

```
prefix [number]
{
    prefix-options
    prefix
}
```

6.3 Stateless configuration

If interface does not contain IA or TA keywords, client will ask for one address (one IA with one address request will be sent). If client should not request any addresses on this interface, *stateless*⁶ keyword must be used. In such circumstances, only specified options will be requested.

6.4 Relay support

Usage of the relays is not visible from the client's point of view: Client can't detect if it communicates via relay(s) or directly with the server. Therefore no special directives on the client side are required to use relays. See section 4.2 for details related to relay deployment.

⁶In the version 0.2.1-RC1 and earlier, this directive was called no-ia. This deprecated name is valid for now, but might be removed in future releases.

6.5 Comments

Comments are allowed in configuration files. All common comment styles are supported:

- C++ style one-line comments: `// this is comment`
- C style multi-line comments: `/* this is multi-line comment */`
- script style one-line comments: `# this is one-line comment`

6.6 File location

Client configuration file should be named `client.conf`. It should be placed in the `/etc/dibbler/` directory (Linux system) or in the current directory (Windows systems). One of design requirements for client was „out of the box” usage. To achieve this, simply use empty `client.conf` file. Client will try to get one address for each up and running interface. More precisely client tries to configure each up, multicast-capable and running interface, which has link address at least 6 bytes long. This usually means that client running in auto-detection mode will not configure tunnels, which usually have IPv4 address (4 bytes long) as their link address. It should configure all wired (Ethernet) and wireless (802.11) interfaces, though.

6.7 Client Reference

This section contains complete list of parameters that are allowed in client configuration file.

Dibbler client supports multiple parameters. Some are defined by the base DHCPv6 specification (a RFC 3315 document [3]), e.g. IA address option. Other parameters are for definition of one of multitude of extensions that were defined for DHCPv6 protocol (e.g. prefix delegation option). Finally, there are many configuration parameters that are not options in DHCPv6 sense, but rather affect the way the software operates (e.g. log level). All those parameters may be defined in client config file. Every statement has defined scope. See Section 6.2 for details. In many cases, parameters may also be defined in scopes larger than its default scope. For example, instead of configuring DNS server option on 3 interfaces, it can be defined once in global scope.

iface – (scope: global). Takes one parameter that can be either string (interface name) or integer (interface index). Defines that client should perform some actions on specified interface. Exact operations are defined within interface scope. Can optionally take second string parameter with the only allowed value of “no-config”. If it is present, it instructs client to not perform any operation on said interface. See Section 6.2.1.

ia – (scope: interface). Defines IA_NA (Identity Association for Non-temporary Addresses), often abbreviated as IA. That is a container for “regular” (non-temporary in DHCPv6 nomenclature) addresses. Simply saying, this is a client’s request for a single normal address. There may be more than one ia defined on one interface. In such case, client will request several addresses. It may have one optional integer parameter that defines unique identifier (IAID). If followed by curly brackets, it will create new IA scope. See Section 6.2.2.

ta – (scope: interface). Defines IA_TA (Identity Association for Temporary Addresses), often abbreviated as TA. This is a container for temporary addresses. Simply saying, this is a client’s request for a temporary address. If followed by curly brackets, it will create new IA scope, similar to IA. See Section 6.2.2. Note that TA scope accepts only limited set of parameters (e.g. iaid).

pd – (scope: interface). Defines IA_PD (Identity Association for Prefix Delegation), often abbreviated as PD. This is a container for prefixes. Simply saying, this is client’s request for prefix delegation.

It may have one optional integer parameter that defines unique identifier (IAID). If followed by curly brackets, it will create new PD scope. See Sections 6.2.4 and 4.1.

address – (scope: ia or ta). Defines an IPv6 address. It is usually defined in IA or TA to specify that an address should be sent. It takes one optional parameter that defines multiplier. For example, to define 3 addresses, following syntax may be used:

```
address 3 { }
```

If followed by curly brackets, creates new address scope. See Section 6.2.5.

prefix – (scope: pd). Defined an IPv6 prefix. It is defined in PD to specify that a prefix should be sent. May be empty (**prefix**) or accompanied with prefix definition that consists of IPv6 address followed by slash and prefix length (e.g. **prefix** 2001:db8:1::/56. If followed by curly brackets, creates new prefix scope. See Section 6.2.6.

work-dir – (scope: global). Takes one string parameter. Defines working directory.

downlink-prefix-ifaces – (scope: global). Takes coma separated list of network interfaces. When client receives prefix from upstream router, it attempts to split it into remaining interfaces. It works in most cases, but if there are strange interfaces or specific requirements, this auto-selection mechanism can be disabled and list of downlink interfaces can be explicitly specified. This command is used for that purpose. See 4.1 and 6.8.11.

log-level – (scope: global). Takes one integer parameter. Defines verbose level of the log messages. The valid range is from 1 (very quiet) to 8 (very verbose). Those values are modelled after levels used in syslog. These are: 1(Emergency), 2(Alert), 3(Critical), 4(Error), 5 (Warning), 6(Notice), 7(Info) and 8(Debug). Currently Dibbler is using levels 3 to 8, as 1 and 2 are reserved for system wide emergency events.

log-name – (scope: global). Takes one string parameter. Defines than name, which will be used during logging.

log-mode – (scope: global). Takes one parameter that can be short, full, precise or syslog. Defines logging mode. In the default, full mode, name, date and time in the h:m:s format will be printed. In short mode, only minutes and seconds will be printed (this mode is useful on terminals with limited width). Precise mode logs information with seconds and microsecond precision. It is a useful as a performance diagnostic tool for finding bottlenecks in the DHCPv6 autoconfiguration process. Syslog works under POSIX systems (Linux, Mac OS X, BSD family) and allows default POSIX logging functions.

log-colors – (scope: global). Takes one boolean parameter. Defines if logs printed to console should use colors. That feature is used to enhance logs readability. As it makes the log files messy on systems that do not support colors, it is disabled by default. The default is off.

strict-rfc-no-routing – (scope: global) During normal operation, DHCPv6 client should add IPv6 address only (i.e. configure it with /128 prefix), without configuring routing. Routing is expected to be configured with i.e. router advertisements [14]. However, this behavior is confusing and lots of users complained about it. Therefore since the 0.5.0RC1 release, this has been changed in Dibbler. Right now when Dibbler client configures address, it also configures routing, so every host is able to communicate with other hosts, which have obtained address from the same server. If you don't like this behavior, you might want to use this option. Note that draft [23] was introduced to solve this DHCPv6 protocol limitation. It is expected to be supported in the next Dibbler release.

- experimental** – (scope: global). Allows enabling experimental features. There are some highly-experimental features present in Dibbler. To make a clear statement about their experimental nature, user is required to acknowledge that fact by putting this statement in its config file. This statement may be present or absent. The default is absent.
- addr-params** – (scope: IA). Allows configuration of additional sub-option conveyed in IAADDR. It supplements the usual information about an address received from a server with prefix length. For example, if client received address 2001:db8:1::abcd and addr-params option contains 64, Dibbler client will configure prefix 2001:db8:1::/64 on the interface that was used to communicate with server. This is experimental feature, not defined in any standard or draft. Requires *experimental* statement. See Section 4.21.1.
- remote-autoconf** – (scope: interface). Defines that remote autoconfiguration should be performed on a given interface. This is experimental feature, so it requires *experimental* statement. See Section 4.21.2.
- ddns-protocol** – (scope: global). Takes one string parameter. Defines protocol that should be used during DNS Update mechanism. Allowed values are `tcp`, `udp` and `any`. Any means that UDP will be tried first and if it fails, update will be retried over TCP. See Section 4.5.
- ddns-timeout** – (scope: global). Takes one integer parameter that specifies timeout in milliseconds. Defines how long client should wait for DNS server response during DNS Update before declaring update a failure. See Section 4.5.
- script** – (scope: global). Takes one string parameter that specifies script name. When dibbler client receives some options it normally sets them up in the system on its own. However, besides of setting up all parameters directly, dibbler client can execute external script. See Section 4.7 for details.
- stateless** – (scope: global). It may be present or missing. The default is missing. Defines that client should run in stateless mode. In this mode only configuration parameters are defined, not addresses or prefixes. It is mutually exclusive with *ia*, *ta* and *pd*. See Section 4.11. *No-ia*, an alias to that command used to be supported, but due to misleading name its support was dropped in 0.8.1RC1.
- anonymous-inf-request** – (scope: global). When running in a stateless mode, client does not ask for addresses or prefixes, but rather requests some general options. By default, it sends its client identifier (DUID) to the server. However, it is possible to omit this identifier, so the *INF-REQUEST* messages will be anonymous. This global option causes client to act in such anonymous way.
- inactive-mode** – (scope: global). This parameter may be present or absent. The default is absent. Normally (with inactive-mode disabled) client tries to bind all interfaces defined in configuration file. If such attempt fails, client reports an error and gives up. In some cases it is possible that interface is not ready yet, e.g. WLAN interface did not complete association. It is possible to modify client behavior, so it will accept downed and not running interfaces. To do so, inactive-mode must be enabled. In this mode, client will accept inactive interfaces, will add them to inactive list and will periodically monitor its state. When the interface finally becomes available, client will try to configure it. See section 4.17 for details.
- insist-mode** – (scope: global). Client can be instructed to obtain several configuration options, like DNS server configuration or domain name. It is possible that server will not provide all requested options. Older versions of the dibbler client had been very aggressive in such case. It tried very hard to obtain options that user specified in config file. To do so, it did send *INF-REQUEST* to obtain such option. This behavior has changed. Right now when client does not receive all requested

options, it will complain, but will take no action. To enable old behavior, so called insist-mode has been added. Insist-mode will also affect the way addresses are requested. If address was specified in config file, client will request it in *REQUEST* message, rather than sending address offered by server in *ADVERTISE* as it is typically done. See Section 4.18 for details.

skip-confirm – (scope: global). Support for *CONFIRM* messages was added in 0.8.0RC1. With it, client may send *CONFIRM* when link state change is detected (e.g. switching to possibly new WiFi access-point or replugging Ethernet cable). Client also sends *CONFIRM* after restart if there are still valid leases found in locally stored databased. *skip-confirm* will disable any actions that would result in *CONFIRM* transmissions. In particular, link state will not be detected and client will ignore its previous address during startup.

duid-type – (scope: global). Takes one parameter. Allowed values are DUID-LLT, DUID-LL or DUID-EN. The default is DUID-LLT. This parameter defines, what type of DUID should be generated if there is no DUID already present. If there is a file containing DUID, this directive has no effect. DUID-LLT means that DUID will be based on link layer address as well as time. DUID-LL means that only link layer address will be used. The last value – DUID-EN – Enterprise Number-based generation has a slightly different syntax:

```
duid-type duid-en enterprise-number enterprise-id.
```

For example: `duid-type duid-en 1234 0x6789abcd` means that enterprise number is set to 1234 and unique number from that company's pool is 67:89:ab:cd (hexadecimal value of arbitrary length). See section 4.19 for details.

option fqdn-s – (scope: global). Takes one boolean parameter and has the default value of 1. The S bit is used in FQDN option. It is used to negotiate, which side (server or client) wants to perform DNS Update procedure. See [13] for details. In general, if you don't know that this option does, you don't want to modify this.

option fqdn – (scope: interface). Takes optional domain name as parameter. This option instructs client to send FQDN option. This option has 2 purposes. The first one is to negotiated or request Fully Qualified Domain Name for this client. The second one is to negotiate, who (client or server) should perform DNS Update. If optional parameter is specified, it will be sent in the FQDN option. Otherwise FQDN will be sent with empty name. This option is defined in [13]. See Section 4.5 for details.

rapid-commit – (scope: interface). Takes one boolean parameter. The default is 0. This option allows rapid commit procedure to be performed. Note that enabling rapid-commit on the client side is not enough. server must be configured to allow rapid commit, too.

unicast – (scope: interface). Takes one boolean parameter. The default value is 0. This option specifies if client should request unicast communication from the server. If server is configured to allow it, it will add unicast option to its replies. It will allow client to communicate with server via unicast addresses instead of usual multicast.

preferred-servers – (scope: interface). Takes list of addresses or list of DUIDs. The default value is empty. This list defines, which servers are preferred. When client sends *SOLICIT* message, all servers available in the local network will respond. When client receives multiple *ADVERTISE* messages, it will choose those sent by servers mentioned on the preferred-server list. Otherwise the best server will be chosen. Note that this parameter used to be spelled differently (single R). Old spelling is still supported, but is deprecated and will be removed soon.

- reject-servers** – (scope: interface). Takes list of addresses or list of DUIDs. The default value is empty. This list defines which server must be ignored. It has opposite meaning to the preferred-servers list. Servers mentioned here will never be chosen.
- vendor-spec** – (scope: interface). This option allow requesting for a vendor specific configuration option or options. Although there are no vendor-specific (i.e. specific for Dibbler) parameters, it can be used to test some other DHCPv6 server implementations. It takes coma separated list following tokens: type (integer), type(integer) – enterprise(number). It allows definition of just vendor-specific option and/or vendor-specific option with specific enterprise. See feature description in Section 4.16.
- T1** – (scope: IA or PD) Takes one parameter that specifies T1 hint sent to a server. The default value is $2^{32} - 1$ and is expressed in seconds. T1 value assigned by server defines after what time client should start renew process. This is only a hint for the server. Actual value will be provided by the server.
- T2** – (scope: IA or PD). Takes one parameter that specifies T2 hint sent to a server. The default value is default: $2^{32} - 1$ and is expressed in seconds. This value defines hint for T2. T2 assigned by server defined after what time client will start emergency rebind procedure if renew process fails. This is only a hint for the server. Actual value will be provided by the server.
- valid-lifetime** – (scope:address or prefix). Takes one integer parameter that defined requested valid lifetime for address or prefix. The default value is $2^{32} - 1$. This parameter is expressed in seconds. This parameter defines valid lifetime of an address. It will be used as a hint for a server, when the client sends *REQUEST* messages.
- preferred-lifetime** – (scope:address or prefix). type: integer, default: $2^{32} - 1$) This parameter defines preferred lifetime of an address. It will be used as a hint for a server, when there client sends *REQUEST* messages. Note that this parameter used to be spelled differently (single R). Old spelling is still supported, but is deprecated and will be removed soon.
- option dns-server** – (scope: interface). Takes optional address list as parameter. This option conveys information about DNS servers available. After retriving this information, client will be able to resolve domain names into IP (both IPv4 and IPv6) addresses. If address list is not specified, client will just request dns-server option from a server. If it is specified, listed addresses will be sent to server as hints. Defined in [5].
- option domain** – (scope: interface). Takes optional domain list as parameter. This option is used for retriving domain or domains names, which the client is connected in. For example, if client's hostname is `alice.mylab.example.com` and it wants to contact `bob.mylab.example.com` it can simply refer to it as `bob`. Without domain name configured, it would have to use full domain name. If optional domain list if defined, it will be sent to server as a hint. Defined in [5].
- option ntp-server** – (scope: interface). Takes optional address list as parameter. This option defines information about available NTP servers. Network Time Protocol [1] is a protocol used for time synchronisation, so all hosts in the network has the same proper time set. If address list is specified, it will be sent to server as a hint. Defined in [12].
- option time-zone** – (scope: interface). Optionally takes one string parameter that specifies requested timezone. It is possible to retrieve timezone from the server. If client is interested in this information, it should ask for this option. Note that this option is considered obsolete as it is mentioned in draft version only [25]. Work on this draft seems to be abandoned as similar functionality is provided in now standard [12]. Unfortunately, it is not supported in Dibbler yet.

- option sip-server** – (scope: interface). Takes optional address list as parameter. Session Initiation Protocol (SIP) [2] is a control protocol for creating, modifying, and terminating sessions with one or more participants. These sessions include Internet telephone calls, multimedia distribution, and multimedia conferences, including VoIP phones. If address list is specified, it will be sent as a hint for a server. Format of this option is defined in [4].
- option sip-domain** – (scope: interface). Takes optional list of domains. It is possible to define domain names for Session Initiation Protocol [2]. Configuration of this parameter will ease usage of domain names in the SIP protocol. If domain list is specified, it will be sent as a hint for a server. Format of this option is defined in [4].
- option nis-server** – (scope: interface). Takes optional address list as parameter. Network Information Service (NIS) is a Unix-based system designed to use common login and user information on multiple systems, e.g. universities, where students can log on to their accounts from any host. To use this functionality, a host needs information about NIS server's address. This can be retrieved with this option. If address list is specified, it will be sent as a hint for a server. Its format is defined in [9].
- option nis-domain** – (scope: interface). Takes optional list of domains. Network Information Service (NIS) can also specify domain names. It can be configured with this option. If domain list is specified, it will be sent as a hint for a server. It is defined in [9].
- option nis+-server** – (scope: interface). Takes optional address list as parameter. Network Information Service Plus (NIS+) is an improved version of the NIS protocol. If address list is specified, it will be sent as a hint for a server. This option is defined in [9].
- option nis+-domain** – (scope: interface). Takes optional list of domains. Similar to nis-domain, it defines domains for NIS+. If domain list is specified, it will be sent as a hint for a server. This option is defined in [9].
- option lifetime** – (scope: interface). This statement can be present or missing. The default is missing. Base spec of the DHCPv6 protocol does offer way of refreshing addresses only, but not the options. Lifetime defines, how often client would like to renew all its options. By default client will not send such option, but it will accept it and act accordingly if the server sends it on its own. Format of this option is defined in [11].
- option aftr** – (scope: interface). In networks that deploy Dual-Stack Lite architecture [17], client (B4) needs to configure DS-Lite tunnel. Client may obtain information about AFTR (a remote tunnel endpoint). This option conveys fully qualified domain name. This statement instructs client to request such option. It is defined in [18].
- option** – (scope: interface). There are number of options supported by Dibbler. There may be cases, however, when user wants to specify its own options. Several syntaxes are supported:

```
option number - hexstring
option number address-keyword address
option number address-list
option number string-keyword string
option number address-keyword request-keyword
option number string request-keyword
option number address-list request-keyword
```

where number designates option number, address-keyword is word “address”, address is an IPv6 address, address-list is comma separated list of IPv6 addresses, string-keyword is a word “string” and request-keyword is a word “request”. See Section 4.4.

auth-enabled – (scope: global). Takes one boolean parameter. The default is 0. This option enables authentication and authorization. When set to true, server support must also be enabled, otherwise all messages will be dropped. See Section 4.14 for details.

auth-accept-methods – (scope: global). Takes coma separated list of accepted authentication methods methods that client will accept from server. If this list is empty, any method will be accepted. Possible values are: `none`, `digest_plain`, `digest_hmac_md5`, `digest_hmac_sha1`, `digest_hmac_sha224`, `digest_hmac_sha256`, `digest_hmac_sha384`, and `digest_hmac_sha512`.

route – (scope: interface). Takes one boolean parameter that defines if routing information should requested or not. The default value is false. See Section 4.3.

After receiving options values from a server, client stores values of those options in separate files in the working directory (`/var/lib/dibbler` in POSIX systems (Linux, Mac OS X and BSD) and current directory in Windows). File names start with the option word, e.g. `option-dns-server`. Dibbler client can also call user defined script after parameters are assigned or removed. Dibbler client also sets DNS servers and domain names on its own on most systems.

6.8 Client Configuration Examples

This subsection contains various examples of the most popular configurations. Several additional examples are provided with the source code. Please download it and look at `*.conf` files.

6.8.1 Example 1: Default

In the most simple case, client configuration file can be empty. Client will try to assign one address for every interface present in the system, except interfaces, which are:

- down (flag UP not set)
- loopback (flag LOOPBACK set)
- not running (flag RUNNING not set)
- not multicast capable (flag MULTICAST not set)
- have link-layer address less than 6 bytes long (this requirement should skip all tunnels and virtual interfaces)

If you must use DHCPv6 on one of such interfaces (which is not recommended and such attempt probably will fail), you must explicitly specify this interface in the configuration file.

6.8.2 Example 2: DNS

Configuration mentioned in previous subsection is a minimal one and in a real life will be used rarely. The most common usage of the DHCPv6 protocol is to request for an address and DNS configuration. Client configuration file achieving those goals is presented below:

```
# client.conf
log-mode short
log-level 7
iface eth0 {
    ia
    option dns-server
}
```

6.8.3 Example 3: Timeouts and specific address

Automatic configuration is being driven by several timers, which define, what action should be performed at various intervals. Since all values are provided by the server, client can only define values, which will be sent to a server as hints. Server might take them into consideration, but might also ignore them completely. Following example shows how to ask for a specific address and provide hints for a server. Client would like to get 2000::1:2:3 address, it would like to renew addresses once in 30 minutes (T1 timer is set to 1800 seconds). Client also would like to have address, which is preferred for an hour and is valid for 2 hours.

```
# client.conf
log-mode short
log-level 7
iface eth0 {
    T1 1800
    T2 2000
    preferred-lifetime 3600
    valid-lifetime 7200
    ia {
        address {
            2000::1:2:3
        }
    }
}
```

6.8.4 Example 4: More than one address

Another example: client would like to obtain 2 addresses on wifi0 interface. They are necessary since this particular interface name contains spaces. It is possible to do this in two ways. First is to send 2 Identity Associations (IA for short). Identity Association is a nice name for a addresses container. This appears to be a most common way of telling server that this client is interested in more than one address.

```
# client.conf
log-mode short
log-level 5
iface wifi0 {
    ia
    ia
}
```

Another way it to send one IA, but include two address hints in it. Server may take them into consideration (dibbler server does), but some other DHCPv6 implementations may ignore those hints.

```
# client.conf
log-mode short
log-level 5
iface wifi0 {
    ia {
        address
        address
    }
}
```


6.8.5 Example 5: Quick configuration using Rapid-commit

Rapid-commit is a shortened exchange with server. It consists of only two messages, instead of the usual four. It is worth to know that both sides (client and server) must also support rapid-commit to use this fast configuration.

```
# client.conf
iface eth1 {
    rapid-commit yes
    ia
    option dns-server
}
```

6.8.6 Example 6: Stateless mode

Client can be configured to work in a stateless mode. It means that it will obtain only some configuration parameters, but no addresses. Let's assume we want all the details stored in a log file and we want to obtain all possible configuration parameters. Here is a configuration file:

```
# client.conf
log-level 8
log-mode full
stateless
iface eth0
{
    option dns-server
    option domain
    option ntp-server
    option time-zone
    option sip-server
    option sip-domain
    option nis-server
    option nis-domain
    option nis+-server
    option nis+-domain
}
```

6.8.7 Example 7: Dynamic DNS (FQDN)

Dibbler client is able to request fully qualified domain name, i.e. name, which is fully resolvable using DNS. After receiving such name, it can perform DNS Update procedure. Client can ask for any name, without any preference. Here is an example how to configure client to perform such task:

```
# client.conf

# Set protocol to one of the following values: udp, tcp, any
ddns-protocol udp

# Sets DDNS Update timeout (in ms)
ddns-timeout 800
```

```
# uncomment following line to force S bit to 0
# option fqdn-s 0
log-level 7

iface eth0 {
# ask for one address
    ia

# ask for options
    option dns-server
    option domain
    option fqdn

# ask for fully qualified domain name (any name will do)
    option fqdn
# you can also provide hint for the server regarding preferred name
# option fqdn dexter.example.org
}
```

In this case, client will mention that it is interested in FQDN by using Option Request and empty FQDN option, as specified in [13]. Server upon receiving such request (if it is configured to support it), will provide FQDN option containing domain name. Depending on the server's configuration, all DNS Updates will be performed by the server, forward will be performed by client and reverse by the server, or only forward will be done by a client.

It is also possible for client to provide its name as a hint for server. Server might take it into consideration when it will choose a name for this client. To send specific hostname, additional parameter (a string with a fully qualified domain name) should be specified.

Two additional parameters were introduced in Dibbler 0.8.1. `ddns-protocol` specifies protocol that should be used for communication with DNS server. Allowed values are `udp`, `tcp` or `any`. “Any” will try to use UDP and if that fails, it will revert to TCP. Second parameter is `ddns-timeout` that specifies maximum time allowed for DNS server to respond before assuming communication failure. It is specified in milliseconds.

Note that to successfully perform DNS Update, address must be assigned and dns server address must be known. Therefore “ia” and “option dns-server” are required for “option fqdn” to work properly. Also if DHCPv6 server provides more than one DNS server address, update will be attempted only for the first address on the list.

It is also possible to force S bit in the FQDN option to 0 or 1. See [13] for details regarding its meaning.

6.8.8 Example 8: Interface indexes

Usually, interface names are referred to by names, e.g. `eth0` or Local Area Connection. Every system also provides unique number associated with each interface, usually called `ifindex` or interface index. It is possible to read the number using `ip 1` command (Linux) or `ipv6 ifx`. Below is an example, which demonstrate how to use interface indexes:

```
# client.conf
log-mode short
log-level 5
iface 5 {
```

```
    ia
}
```

6.8.9 Example 9: Vendor-specific options

It is possible to configure dibbler-client to ask for a vendor specific options. Although there are no dibbler-specific features to configure, it is possible to use this option to test other server implementations. This option will rather be used by network engineers and power network admins, rather than normal end users.

There are 3 ways to define, how dibbler-client can request vendor-specific options. First choice: It can just ask for this option (only *option request option* will be sent). Second choice: it can ask for vendor-spec option by adding such option with enterprise number set, but no actual data. Third choice: send this option and include both enterprise number and actual data. In the following configuration file example, uncomment appropriate line to obtain desired behavior:

```
# client.conf
log-level 8
iface eth0 {
# ask for address
    ia

# uncomment only one of the following lines:
    option vendor-spec
#   option vendor-spec 1234
#   option vendor-spec 1234 0x0002abcd

# To ask for multiple vendor-spec options, uncomment:
#   option vendor-spec 123,456
}
```

Although that is almost never needed, it is possible to configure client to request multiple vendor-specific options at the same time. That feature is mainly used as a test tool for the server. To use it, uncomment last line in the example above.

6.8.10 Example 10: Unicast communication

Client would like to obtain an address on „Local Area Connection” interface. Note quotation marks around interface name. They are necessary since this particular interface name contains spaces. Client also would like to accept Unicast communication if server supports it. User wants all information to be logged via Linux syslog daemon. Take note that you won't be able see to what Dibbler is doing with such low log-level. (Usually log-level should be set to 7, which is also a default value).

```
# client.conf
log-mode syslog
log-level 5
iface "Local Area Connection" {
    unicast yes
    ia
    ia
}
```

6.8.11 Example 11: Prefix delegation

From the client's point of view, configuration is quite simple. It is required to specify that this client is interested in prefix delegation. See section 4.1 for background information related to prefix delegation and sections 5.1.13 and 5.1.14 for details about server configuration. To ask for prefix delegation, *emphprefix-delegation* (or *pd*) should be used.

```
# client.conf
iface "eth0" {
    ia // ask for address
    pd // ask for prefix
}
```

It is possible to define additional parameters for a prefix:

```
# client.conf
iface eth0 {
    pd {
        t1 1000
        t2 2000
    }
}
```

Client (requesting router in PD nomenclature) receives prefix from upstream router and tries to auto-select downstream interfaces. It tries to use interfaces that are up, running, multicast-capable, with MAC address at least 6 bytes long and were not used to obtain prefix. If this algorithm does not work in your case (e.g. because you want to use prefixes on other interfaces or you want some interfaces to be skipped), it is possible to explicitly enumerate downstream interfaces using *downlink-prefix-ifaces*:

```
# client.conf

# received prefix will be split among following interfaces
downlink-prefix-ifaces eth1, eth5

# Ask for prefix over eth0
iface eth0 {
    pd
}
```

6.8.12 Example 12: Insist mode

During normal operation, when client asks for an option, but does not receive it from the server, it complains, but takes no action. To force client to insist (i.e. ask over and over again), so called insist mode has been introduced. See section 4.18 for extended explanation.

```
insist-mode
iface "eth0" {
    ia
    option dns-server
    option domain
    option ntp-server
}
```

6.8.13 Example 13: Inactive mode

Usually client starts when network interfaces are operational. Normally downed or nonexistent interfaces mentioned in the configuration file are considered misconfiguration and client refuses to start. However, sometimes that is not the case, e.g. still waiting to be associated wireless interfaces. To allow operation in such circumstances, inactive mode has been added. See 4.17 for detailed explanation. interfaces are spec

```
inactive-mode
iface "eth0" {
    ia
}
```

6.8.14 Example 14: Authentication

Authentication is enabled. Client will accept HMAC-SHA-512, HMAC-MD5 and HMAC-SHA-256 as an authentication method.

```
# client.conf

log-mode short
log-level 7

auth-enabled true
auth-accept-methods digest-hmac-sha512, digest-hmac-md5, digest-hmac-sha256

iface eth0 {
}
```

6.8.15 Example 15: Skip Confirm

Client detects if previous client instance was not shutdown properly (due to power outage, client crash or similar event). In such case, it reads existing address database and checks if assigned addresses may still be valid. If that is so, it tries to confirm those addresses by using *CONFIRM* message.

If user don't want *CONFIRM* message to be send and client should start "from scratch" every time, it is possible to disable confirm support.

```
# client.conf

log-mode short
log-level 7
skip-confirm

iface eth0 {
    ia
}
```

6.8.16 Example 15: User-defined IAID

Sometimes it is useful to define specific IAID identifiers. That is rather uncommon, but possible. This technique can be used for both addresses (IA_NA options) and prefixes (IA_PD options).

```
# client.conf

iface "eth0" {
    ia 123
    option dns-server
    option domain
}
```

6.8.17 Example 16: DS-Lite tunnel (AFTR)

Server may provide information about AFTR (a Dual Stack Lite tunnel endpoint) to the clients, as specified in [18].

```
iface "eth0" {
    ia
    option aftr # request name of the remote DS-Lite tunnel endpoint
}
```

6.8.18 Example 17: Custom options

Client is able to ask for custom options, that are not supported by default. Following config file allows client to ask for many options. Also, see Section 4.4 for extended explanation.

```
#client.conf
iface "eth0" {
    unicast 1
    ia

    option 145 duid 01:02:a3:b4:c5:dd:ea
    option 146 address 2001:db8:1::dead:beef
    option 147 address-list 2001:db8:1::aaaa,2001:db8:1::bbbb
    option 148 string "secretlair.example.org"

    option 149 string request
    option 150 address request
    option 151 address-list request
}
```

6.8.19 Example 18: Remote Autoconfiguration

Client is able to use experimental extension to ask for configuration remotely. See Section 4.21.2 for details.

```
log-mode short
log-level 8
experimental
remote-autoconf

iface "eth0" {
    ia
    unicast 1
}
```

```
option dns-server  
option domain  
option nis-server  
option nis-domain  
option nis+-server  
option nis+-domain  
option time-zone  
option lifetime  
}
```

7 Relay configuration

Relay configuration is stored in `relay.conf` file in the `/etc/dibbler/` directory (Linux systems) or in current directory (Windows systems).

7.1 Global scope

Every option can be declared in global scope. Config file consists of global options and one or more interface definitions. Note that reasonable minimum is 2 interfaces, as defining only one would mean to resend messages on the same interface.

7.2 Interface declaration

Interface can be declared this way:

```
iface interface-name
{
    interface options
}
```

or

```
iface number
{
    interface options
}
```

where `name_of_the_interface` denotes name of the interface and `number` denotes it's number. It does not need to be enclosed in single or double quotes (except windows cases, when interface name contains spaces).

7.3 Options

Every option has a scope it can be used in, default value and sometimes allowed range.

log-level – (scope: global, type: integer, default: 7) Defines verbose level of the log messages. The valid range is from 1 (Emergency) to 8 (Debug). The higher the logging level is set, the more messages dibbler will print.

log-name – (scope: global, type: string, default: Client). Defines name, which should be used during logging.

log-mode – (scope: global, type: short, full or precise, default value: full) Defines logging mode. In the default, full mode, name, date and time in the `h:m:s` format will be printed. In short mode, only minutes and seconds will be printed (this mode is useful on terminals with limited width). Recently added precise mode logs information with seconds and microsecond precision. It is a useful for finding bottlenecks in the DHCPv6 autoconfiguration process.

interface-id-order – (scope: global, type: before, after or omit, default: before) Defines placement of the interface-id option. Options can be placed in the *RELAY-FORW* message in arbitrary order. This option has been specified to control that order. *interface-id* option can be placed before or after *relay-message* option. There is also possibility to instruct server to omit the *interface-id* option altogether, but since this violates [3], it should not be used. In general, this configuration parameter is only useful when dealing with buggy relays, which can't handle all option orders properly. Consider this parameter a debugging feature. Note: similar parameter is available in the dibbler-server.

- client multicast** – (scope: interface, type: boolean, default: false) This command instructs dibbler-relay to listen on this particular interface for client messages sent to multicast (ff02::1:2) address.
- client unicast** – (scope: interface, type: address, default: not defined) This command instructs dibbler-relay to listen to messages sent to a specific unicast address. This feature is usually used to connect multiple relays together.
- server multicast** – (scope: interface, type: boolean, default: false) This command instructs dibbler-relay to send messages (received on any interface) to the server multicast (ff05::1:3) address. Note that this is not the same multicast address as the server usually listens to (ff02::1:2). Server must be specifically configured to be able to receive relayed messages.
- server unicast** – (scope: interface, type: address, default: none) This command instructs dibbler-relay to send message (received on any interface) to specified unicast address. Server must be properly configured to be able to receive unicast traffic. See *unicast* command in the 5.1.4 section.
- interface-id** – (scope: interface, type: integer, default: none) This specifies identifier of a particular interface. It is used to generate *interface-id* option, when relaying message to the server. This option is then used by the server to detect, which interface the message originates from. It is essential to have consistent interface-id defined on the relay side and server side. It is worth mentioning that interface-id should be specified on the interface, which is used to receive messages from the clients, not the one used to forward packets to server.
- guess-mode** – (scope: global, type: boolean, default: no) Switches relay into so called guess-mode. Under normal operation, client sends messages, which are encapsulated and sent to the server. During this encapsulation relay appends *interface-id* option and expects that server will use the same *interface-id* option in its replies. Relay then uses those *interface-id* values to detect, which the original request came from and sends reply to the same interface. Unfortunately, some servers does not sent *interface-id* option. Normally in such case, dibbler-relay drops such server messages as there is no easy way to determine where such messages should be relayed to. However, when guess-mode is enabled, dibbler-relay tries to guess the destination interface. Luckily, it is often trivial to guess as there are usually 2 interfaces: one connected to server and second connected to the clients.

7.4 Relay configuration examples

Relay configuration file is fairly simple. Relay forwards DHCPv6 messages between interfaces. Messages from client are encapsulated and forwarded as RELAY_FORW messages. Replies from server are received as RELAY_REPL message. After decapsulation, they are being sent back to clients.

It is vital to inform server, where this relayed message was received. DHCPv6 does this using interface-id option. This identifier must be unique. Otherwise relays will get confused when they will receive reply from server. Note that this id does not need to be aligned with system interface id (ifindex). Think about it as "ethernet segment identifier" if you are using Ethernet network or as "bss identifier" if you are using 802.11 network.

If you are interested in additional examples, download source version and look at *.conf files.

7.4.1 Example 1: Simple

Let's assume this case: relay has 2 interfaces: eth0 and eth1. Clients are located on the eth1 network. Relay should receive data on that interface using well-known ALL_DHCP_RELAYS_AND_SERVER multicast address (ff02::1:2). Note that all clients use multicast addresses by default. Packets received on the eth1 should be forwarded on the eth0 interface, using multicast address. See section 5.1.8 for corresponding server configuration.

```
# relay.conf
log-level 8
log-mode short
iface eth0 {
    server multicast yes
}
iface eth1 {
    client multicast yes
    interface-id 5020
}
```

7.4.2 Example 2: Unicast/multicast

It is possible to use unicast addresses instead/besides of default multicast addresses. Following example allows message reception from clients on the 2000::123 address. It is also possible to instruct relay to send encapsulated messages to the server using unicast addresses. This feature is configured in the next section (7.4.3).

```
# relay.conf
log-level 8
log-mode short
iface eth0 {
    server multicast yes
}
iface eth1 {
    client multicast yes
    client unicast 2000::123
    interface-id 5020
}
```

7.4.3 Example 3: Multiple interfaces

Here is another example. This time messages should be forwarded from eth1 and eth3 to the eth0 interface (using multicast) and to the eth2 interface (using server's global address 2000::546). Also clients must use multicasts (the default approach):

```
# relay.conf
iface eth0 {
    server multicast yes
}
iface eth2 {
    server unicast 2000::456
}
iface eth1 {
    client multicast yes
    interface-id 1000
}
iface eth3 {
    client multicast yes
    interface-id 1001
}
```

```
}
```

7.4.4 Example 4: 2 relays

Those two configuration files correspond to the „2 relays” example provided in section 5.1.9. See section 4.2 for detailed explanations.

```
# relay.conf - relay 1
log-level 8
log-mode full

# messages will be forwarded on this interface using multicast
iface eth2 {
    server multicast yes // relay messages on this interface to ff05::1:3
    # server unicast 6000::10 // relay messages on this interface to this global address
}

iface eth1 {
# client multicast yes // bind ff02::1:2
    client unicast 6011::1 // bind this address
    interface-id 6011
}
```

```
# relay.conf - relay 2
iface eth0 {
# server multicast yes // relay messages on this interface to ff05::1:3
    server unicast 6011::1 // relay messages on this interface to this global address
}

# client can send messages to multicast
# (or specific link-local addr) on this link
iface eth1 {
    client multicast yes // bind ff02::1:2
# client unicast 6021::1 // bind this address
    interface-id 6021
}
```

7.4.5 Example 5: Guess-mode

In the 0.6.0 release, a new feature called guess-mode has been added. When client sends some data and relay forwards it to the server, it always adds interface-id option to specify, which link the data has been originally received on. Server, when responding to such request, should include the same interface-id option in the reply. However, in some poor implementations, server fails to do that. When relay receives such poorly formed response from the server, it can't decide which interface should be used to relay this message.

Normally such packets are dropped. However, it is possible to switch relay into a guess-mode. It tries to find any suitable interface, which it can forward data on. It is not very reliable, but sometimes it is better than dropping the message altogether.

```
# relay.conf
```

```
log-level 8
log-mode short
guess-mode

iface eth0 {
    server multicast yes
}
iface eth1 {
    client multicast yes
    interface-id 5020
}
```

7.4.6 Example 6: Relaying to multicast

During normal operation, relay sends forwarded messages to a *All_DHCP_Servers* (FF05::1:3) multicast address.

Although author does not consider this an elegant solution, it is also possible to instruct relay to forward message to a *All_DHCP_Relay_Agents_and_Servers* (ff02::1:2) multicast address. That is quite convenient when there are several relays connected in a cascade way (server – relay1 – relay2 – clients).

For details regarding DHCPv6-related multicast addresses and relay operation, see [\[3\]](#).

To achieve this behavior, *server unicast* can be used. Note that name of such parameter is a bit misleading (“server unicast” used to specify multicast address). That parameter should be rather called “destination address”, but to maintain backward compatibility, it has its current name.

```
# relay.conf
log-level 8
log-mode short

iface eth0 {
    server unicast ff02::1:2
}
iface eth1 {
    client multicast yes
    interface-id 5020
}
```

8 Requestor configuration

Requestor (entity used for leasequery) does not use configuration files. All parameters are specified by command-line switches. See [section 4.10](#) for details.

9 Frequently Asked Questions

Soon after initial Dibbler version was released, feedback from user regarding various things started to appear. Some of the questions were common enough to get into this section.

9.1 Common Questions

Q: Why client does not configure routing after assigning addresses, so I cannot e.g. ping other hosts?

A: It's a common misunderstanding. DHCPv4 provides many configuration parameters to host, with default router address being one of them. Things are done differently in IPv6. Routing configuration is supposed to be conveyed using Router Advertisements (RA) messages, announced periodically by routers. Hosts are supposed to listen to those messages and configure their routing appropriately. Note that this mechanism is completely separate from DHCPv6. It may sound a bit strange, but that's the way it was meant to work.

Properly implemented clients are supposed to configure leased address with /128 prefix and learn the actual prefix from RA. As this is inconvenient, many clients (with dibbler included) bend the rules and configure received addresses with /64 prefix. Please note that this value is arbitrary chosen and may be improper in many scenarios.

Note: This behaviour has changed in the 0.5.0 release. Previous releases configured received address with /128 prefix. To restore old, more RFC conformant behavior, see *strict-rfc-no-routing* directive in the 6.6 section.

Q: Dibbler server receives SOLICIT message, prints information about ADVERTISE/REPLY transmission, but nothing is actually transmitted. Is this a bug?

A: Are you sure that your client is behaving properly and responds to Neighbor Discovery (ND) requests? Before any IPv6 packet (that includes DHCPv6 message) is transmitted, recipient reachability is checked (using Neighbor Discovery protocol [14]). Server sends Neighbor Solicitation message and waits for client's Neighbor Advertisement. If that is not transmitted, even after 3 retries, server gives up and doesn't transmit IPv6 packet (DHCPv6 reply, that is) at all. Being not able to respond to the Neighbor Discovery packets may indicate invalid client behavior.

Q: Dibbler sends some options which have values not recognized by the Ethereal/Wireshark or by other implementations. What's wrong?

A: DHCPv6 is a relatively new protocol and additional options are in a specification phase. It means that until standardisation process is over, they do not have any officially assigned numbers. Once standardization process is over (and RFC document is released), this option gets an official number.

There's pretty good chance that different implementors may choose different values for those not-yet officially accepted options. To change those values in Dibbler, you have to modify file `misc/DHCPConst.h` and recompile server or client. See Developer's Guide, section *Option Values* for details.

Q: I can't get (insert your trouble causing feature here) to work. What's wrong?

A: Go to the project <http://klub.com.pl/dhcpv6/homepage> and browse [list archives](#). If your problem was not reported before, please don't hesitate to write to the [mailing list](#) or [contact author](#) directly.

9.2 Linux specific questions

Q: I can't run client and server on the same host. What's wrong?

A: First of all, running client and server on the same host is just plain meaningless, except testing purposes only. There is a problem with sockets binding. To work around this problem, consult Developer's Guide, Tip section how to compile Dibbler with certain options.

Q: After enabling unicast communication, my client fails to send REQUEST messages. What's wrong?

A: This is a problem with certain kernels. My limited test capabilities allowed me to conclude that there's problem with 2.4.20 kernel. Everything works fine with 2.6.0 with USAGI patches. Patched kernels with enhanced IPv6 support can be downloaded from <http://www.linux-ipv6.org/>. Please let me know if your kernel works or not.

9.3 Windows specific questions

Q: After installing *Advanced Networking Pack* or *Windows XP ServicePack2* my DHCPv6 (or other IPv6 application) stopped working. Is Dibbler compatible with Windows XP SP2?

A: Both products (Advanced Networking Pack as well as Service Pack 2 for Windows XP) provide IPv6 firewall. It is configured by default to reject all incoming IPv6 traffic. You have to disable this firewall. To disable firewall on the „Local Area Connection” interface, issue following command in a console:

```
netsh firewall set adapter "Local Area Connection" filter=disable
```

Q: Server or client refuses to create DUID. What's wrong?

A: Make sure that you have at least one up and running interface with at least 6 bytes long MAC address. Simple ethernet or WIFI card matches those requirements. Note that network cable must be plugged (or in case of wifi card – associated with access point), otherwise interface is marked as down.

Q: Is Microsoft Windows 8 supported?

A: Unfortunately, Windows 8 is not supported yet.

10 Miscellaneous topics

10.1 History

Dibbler project was started as master thesis by Tomasz Mrugalski and Marek Senderski on Computer Science faculty on Gdansk University of Technology. Both authors graduated in september 2003 and soon after started their jobs.

During master thesis writing, it came to my attention that there are other DHCPv6 implementations available, but none of them has been named properly. Referring to them was a bit silly: „DHCPv6 published on sourceforge.net has better support than DHCPv6 developed in KAME project, but our DHCPv6 implementation...”. So I have decided that this implementation should have a name. Soon it was named Dibbler after famous CMOT Dibbler from Discworld series by Terry Pratchett.

Sadly, Marek does not have enough free time to develop Dibbler, so his involvement is non-existent at this time. However, that does not mean, that this project is abandoned. It is being actively developed by me (Tomek). Keep in mind that I work at full time and do Ph.D. studies, so my free time is also greatly limited.

10.2 Contact and reporting bugs

There is an website located at <http://klub.com.pl/dhcpv6>. If you belive you have found a bug, please put it in Bugzilla – it is a bug tracking system located at <http://klub.com.pl/bugzilla>. If you are not familiar with that kind of system, don't worry. After simple registration, you will be asked for system and Dibbler version you are using and so on. Without feedback from users, author will not be aware of many bugs and so will not be able to fix them. That's why users feedback is very important. You can also send bug report directly using e-mail. Be sure to be as detailed as possible. Please include both server and client log files, both config and xml files. If you are familiar with tcpdump or ethereal, traffic dumps from this programs are also great help.

If you are not sure if your issue is a bug or a configuration problem, you may also want to browse archives and ask on a mailing list. See following subsection for details.

If you have used Dibbler and it worked ok, this documentation answered all you question and everything is in order (hmmm, wake up, it must be a dream, it isn't reality:), also send a short note to author. He can be contated at [thomson\(at\)klub\(dot\)com\(dot\)pl](mailto:thomson@klub.com.pl) (replace (at) with @ and dot with .). Be sure to include information which country do you live in. It's just author's curiosity to know where Dibbler is being used or tested.

10.3 Mailing lists

There are two mailing lists related to the Dibbler project:

dibbler – Maling list for Dibbler users. It is used to ask for help, report bugs, hay hello and things like that. If you are not sure, what to do, people on this list will try to help you. Web-inteface link: <http://klub.com.pl/cgi-bin/mailman/listinfo/dibbler>

dibbler-devel – That list is intended as a way of communication between people, who are technically involved in the dibbler development. If you are going to improve dibbler in any way, make sure that you announce it here. You may get help. Also if you are trying to fix a bug on your own (hey, that's great!), this list is a good place to talk about it. Web-interface link: <http://klub.com.pl/cgi-bin/mailman/listinfo/dibbler-devel>

Both lists have archives available on-line. You can join or leave one or both lists at any time using convenient web-interface or using traditional mail-based approach.

10.4 Thanks and greetings

I would like to send my thanks and greetings to various persons. Without them, Dibbler would not be where it is today. For a full list of contributors, see AUTHORS file.

Marek Senderski – He's author of almost half of the Dibbler code. Without his efforts, Dibbler would be simple, long forgotten by now master thesis.

Jozef Wozniak – My master thesis' supervisor. He allowed me to see DHCP in a larger scope as part of network provisioning process.

Jacek Swiatowiak – He's my master thesis consultant. He guided Marek and me to take first steps with DHCPv6 implementation.

Ania Szulc – Discworld fan and a great girl, too. She's the one who helped me to decide how to name this yet-untitled DHCPv6 implementation.

Christian Strauf – Without his queries and questions, Dibbler would be abandoned in late 2003.

Bartek Gajda – His interest convinced me that Dibbler is worth the effort to develop it further.

Artur Binczewski and Maciej Patelczyk – They both ensured that Dibbler is (and always will be) GNU GPL software. Open source community is grateful.

Josep Sole – His mails (directly and indirectly) resulted in various fixes and speeded up of 0.2.0 release.

Sob – He has ported 0.4.0 back to Win2000 and NT. As a direct result, 0.4.1 was released for those platforms, too.

Guy "GMSOft" Martin – He has provided me with access to HPPA machine, so I was able to squish some little/big endian bugs. He also uploaded ebuild to the Gentoo portage.

Bartosz "fEnio" Fenski – He taught me how much work needs to be done, before deb packages are considered ok. It took me some time to understand that more pain for the package developer means less problems for the end user. Thanks to him, Dibbler is now part of the Debian GNU/Linux distribution.

Adrien Clerc and his team – Their contribution of the DNS Updates code is most welcome.

Krzysztof Wnuk – He has fixed, improved and extended DNS Updates support as well as provided initial support for prefix delegation.

Alain Durand – Thanks for the invitation to interop test session and for allowing me to see DHCPv6 issues in a much broader scope.

Petr Písar – He has reported lots of bugs, and also often provides fixes. Thanks.

Paul Schauer – Thanks to his efforts, Dibbler now works on Mac OS X. He did majority of the porting work and then did numerous rounds of testing and debugging.

11 Acknowledgements

Author would like to acknowledge following projects and programmes that supported or continue to support research and development of the Dibbler software and related activities.

This work has been partially supported by the Polish Ministry of Science and Higher Education under the European Regional Development Fund, Grant No. POIG.01.01.02-00-045/09-00 **Future Internet Engineering**.



**NATIONAL
COHESION STRATEGY**




future internet engineering



EUROPEAN UNION
EUROPEAN REGIONAL
DEVELOPMENT FUND



The Dibbler project was created as master thesis at **Department of Computer Communications**, at **Faculty of Electronics, Telecommunications and Informations**, at **Gdansk University of Technology**.



References

- [1] Mills, D., “Simple Network Time Protocol (SNTP) Version 4 for IPv4, IPv6 and OSI”, [RFC2030](#), IETF, October 1996.
- [2] J.Rosenberg and H. Schulzrinne, “Session Initiation Protocol (SIP): Locating SIP Servers”, [RFC3263](#), IETF, June 2002.
- [3] R. Droms, Ed. “Dynamic Host Configuration Protocol for IPv6 (DHCPv6)”, [RFC3315](#), IETF, July 2003.
- [4] H. Schulzrinne, and B. Volz “Dynamic Host Configuration Protocol (DHCPv6) Options for Session Initiation Protocol (SIP) Servers”, [RFC3319](#), IETF, July 2003.
- [5] S. Thomson, C. Huitema, V. Ksinant and M. Souissi “DNS Extensions to Support IP Version 6”, [RFC3596](#), IETF, October 2003.
- [6] O. Troan, and R. Droms “IPv6 Prefix Options for Dynamic Host Configuration Protocol (DHCP) version 6”, [RFC3633](#), IETF, December 2003.
- [7] R. Droms, Ed. “DNS Configuration options for Dynamic Host Configuration Protocol for IPv6 (DHCPv6)”, [RFC3646](#), IETF, December 2003.
- [8] R. Droms, “Stateless Dynamic Host Configuration Protocol (DHCP) Service for IPv6”, [RFC3736](#), IETF, April 2004.
- [9] V. Kalusivalingam “Network Information Service (NIS) Configuration Options for Dynamic Host Configuration Protocol for IPv6 (DHCPv6)”, [RFC3898](#), IETF, October 2004.
- [10] R. Arends, R. Austein, M. Larson, D. Massey and S. Rose “DNS Security Introduction and Requirements”, [RFC4033](#), IETF, March 2005
- [11] S. Venaas, T. Chown, and B. Volz “Information Refresh Time Option for DHCPv6”, [RFC4242](#), IETF, Nov. 2005.
- [12] V. Kalusivalingam “Simple Network Time Protocol (SNTP) Configuration Option for DHCPv6”, [RFC4075](#), IETF, May 2005.
- [13] M. Stapp and B.Volz “The Dynamic Host Configuration Protocol for IPv6 (DHCPv6) Client Fully Qualified Domain Name (FQDN) Option”, [RFC4704](#), IETF, October 2006
- [14] T.Narten, E.Nordmark, W.Simpson and H.Soliman, “Neighbor Discovery for IP version 6 (IPv6)”, [RFC4861](#), IETF, September 2007
- [15] S.Thomson, T.Narten, T.Jinmei, “IPv6 Stateless Address Autoconfiguration”, [RFC4862](#), IETF, September 2007
- [16] J. Brzozowski, K. Kinnear, B. Volz and S. Zeng “DHCPv6 Leasequery”, [RFC5007](#), IETF, September 2007
- [17] A.Durand, R.Droms, J.Woodyatt, Y.Lee, “Dual-Stack Lite Broadband Deployments Following IPv4 Exhaustion”, [RFC6333](#), IETF, Aug. 2011
- [18] D.Hankins, T.Mrugalski, “Dynamic Host Configuration Protocol for IPv6 (DHCPv6) Options for Dual-Stack Lite”, [RFC6334](#), IETF, Aug. 2011

- [19] Vishnu Ram, Saumya Upadhyaya, Nitin Jain “Authentication, Authorization and key management for DHCPv6”, work in progress (expired), draft-ram-dhc-dhcpv6-aakey-01, IETF, August 2006
- [20] T. Mrugalski, “Optimization of the autoconfiguration mechanisms of the mobile stations supporting IPv6 protocol in the IEEE 802.16 environmentdfdf”, Ph.D dissertation, Gdańsk, Oct. 2009
- [21] T. Mrugalski, J.Wozniak, K.Nowicki, “Remote DHCPv6 Autoconfiguration for Mobile IPv6 nodes”, IEEE 14th International Telecommunications Network Strategy and Planning Symposium, Warsaw, Poland, Sept. 2010
- [22] T.Mrugalski, J.Wozniak, K.Nowicki, “Remote Stateful Autoconfiguration for Mobile IPv6 Nodes with Server Side Duplicate Address Detection”, IEEE, Australasin Telecommunication Networks and Applications Conference, Auckland, New Zealand, Nov. 2010
- [23] W.Dec, T.Mrugalski, T.Sun, B. Sarikaya, “DHCPv6 Route Options”, MIF WG, work in progress, draft-ietf-mif-dhcpv6-route-option-03, IETF, Sep. 2011 .
- [24] T.Mrugalski, “Remote DHCPv6 Autoconfiguration”, work-in-progress (expired), IETF, July 2010
- [25] A.K. Vijayabhaskar “Time Configuration Options for DHCPv6”, work in progress (expired), draft-ietf-dhc-dhcpv6-opt-timeconfig-03, IETF, October 2003